


Alarm Bells with Lamp for Vessels and Heavy Industrial Applications

SAB Series



SAB130-Bell housing Ø130mm SAB200-Bell housing Ø200mm

PRODUCT SPECIFICATION

SAB130 | SAB200

Materials Bell-Steel, Housing-ABS
Ambient operating temperature -25°C to +50°C
Protection rating IP44
Standard color Housing-beige, Bell/Lamp-Red
Cable entry Ø20

- Electric solenoid bell system provides excellent durability to vibration and shock for vessels and large facilities
- Special material for bell housing provides clear and crisp alarm sound
- Easy wiring and maintenance with terminal box attached
- Lamp attached provides visual signals
- Bell and lamp operation is synchronized. Each function can also operate separately



SAB130
(Max.95dB)

SAB130 / SAB200 Alarm Bells with Lamp for Vessels and Heavy Industrial Applications , Max.95dB


| Model number | Frequency | Volume | Bell diameter | Voltage | Current | Certificates | Weight | Color |
|--------------|-----------|----------|---------------|---------|---------|--------------|--------|---------|
| | | | | DC24V | 1.3A | | | |
| SAB130 | 400 | Max.95dB | 130mm | AC110V | 380mA | CE | 1.88kg | ● R-Red |
| SAB200 | -600Hz | | 200mm | AC220V | 300mA | | | |



SAB200
(Max.95dB)

Technical Diagram

Units: mm

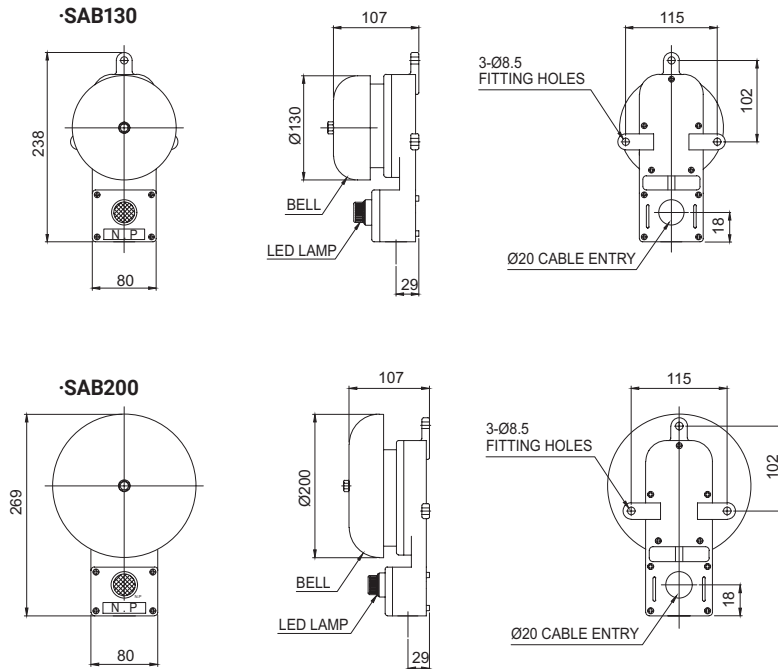

Ordering Specification

| | | | | |
|------------------|---|--------------------------------------|---|---|
| SAB200 | - | 110 | - | CG |
| [Model number] | | [Voltage] | | [Cable gland] |
| SAB130 SAB200 | | 24-DC24V 110-AC110V 220-AC220V | | None-Back wiring type CG-Built-in cable gland type |

Customization

- Two way cable entries with PG19