

ELECTRONIC FLASH SIREN 230 V a.c. FS -602

Product description-Operation

The device FS-602 is a wall-mounted indoor flash siren of general purpose. The FS-602 was designed to be used in places with noisy environments. It is connected to the mains power supply voltage (230V a.c.). The device was manufactured in conformity with provisions of directives and international standards EN-61000-3-2, EN-61000-3-3, EN-61000-6-1.

Installation


Install the device using the included mounting accessories. When screwing the siren, keep in mind that the cable should pass through the hole carefully, in order to avoid mechanical strain.

Connection

Connect the mains power supply of 230V a.c., to the connection terminal that is located on the board. The supply cables must have a cross section at least $2 \times 1 \text{ mm}^2$ and be suitable for a voltage of 230V a.c.

Precautions

The device must be installed in a place with difficult access to children, indoor or in a covered outdoor spot. The siren must be protected from excessive moisture (steam) and heat (radiators). The connection of the device must be made by a qualified technician and after it has been ensured that the lines do not have voltage,

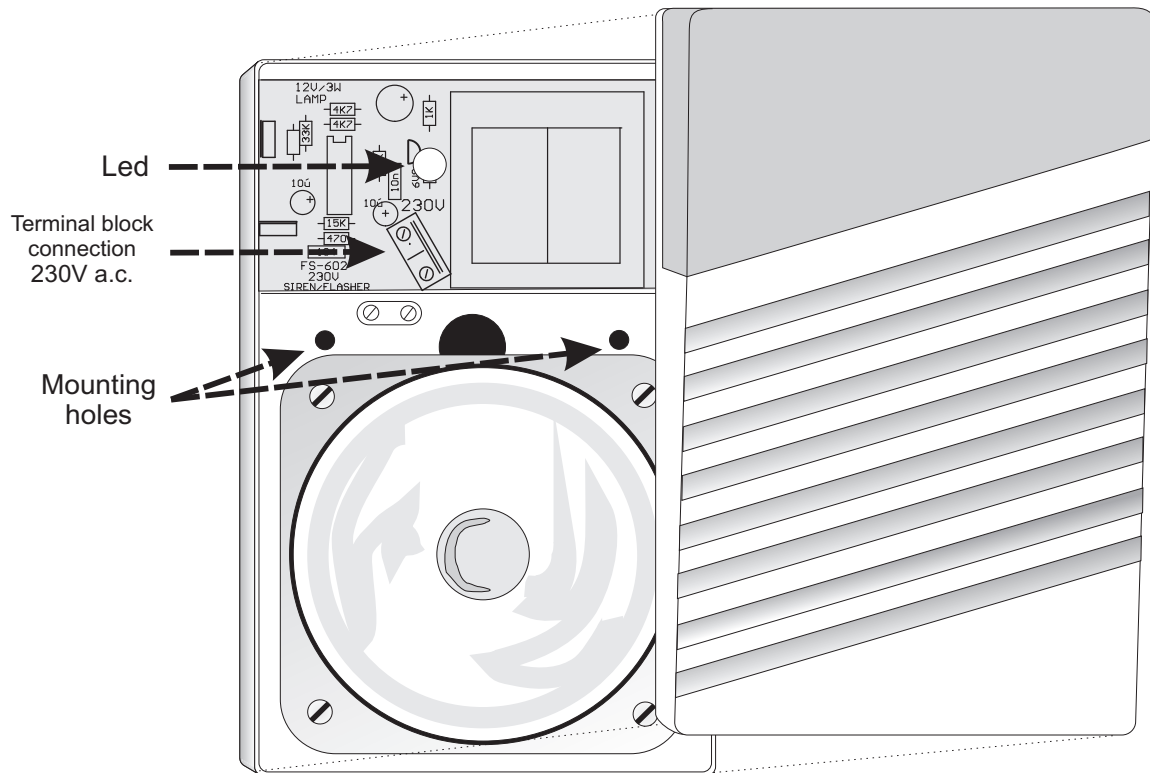

Technical specifications

Operating voltage	230V/50Hz a.c.
Average power consumption	8 VA max
Sound output	95 db / m
Lamp	Led 120°
Operating temperature	-10 °C to +60 °C
Maximum humidity	95 %
Construction material	ABS
Dimensions	160mm x 100mm x 66mm



IP 20



Made in Greece