




CONNECTION DIAGRAM

(Unit : mm)

COUPLINE DEVICE

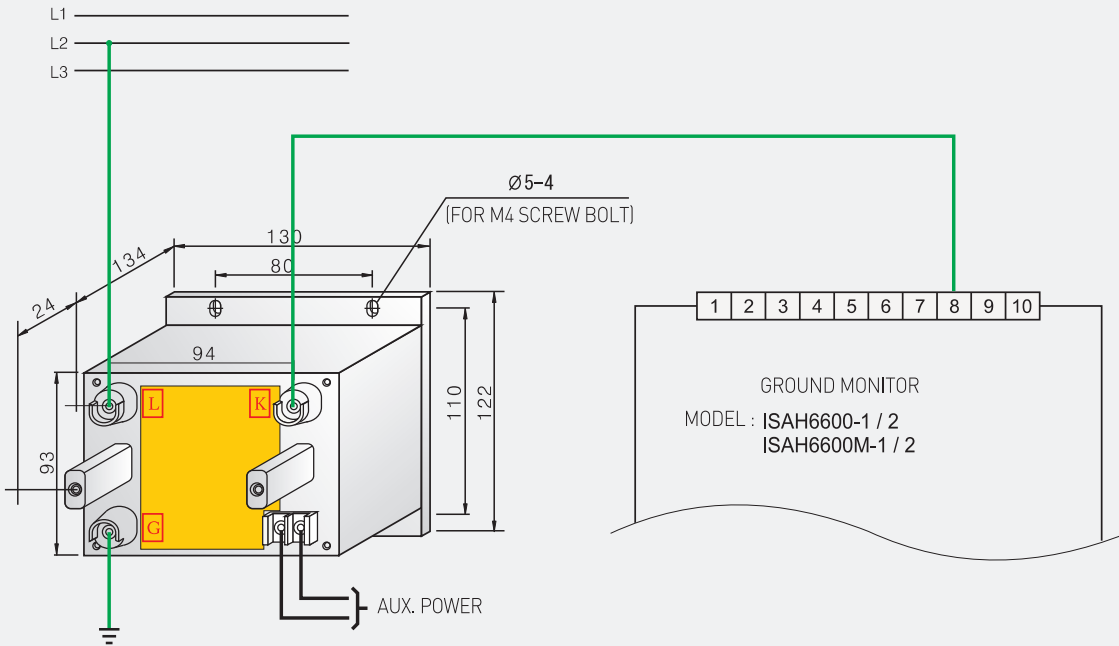

CASE MATERIAL : PC(R3000 + GW) Thermostable and high insulation
 FITTING HOLE : 80 X 110

SPECIFICATIONS

MODEL	ICHV6600-1	ICHV6600-2
AUX. POWER RATING	AC 110V 50/60Hz	AC 220V 50/60Hz
RANGE OF POWER VARIATION	AC 85-135V	AC 170-270V
RATED INSULATION VOLTAGE	AC 6.6KV 50/60Hz	
RANGE OF INSULATION VOLTAGE	AC 0 ~ 7590V	
IMPULSE	12KV	
DIELECTRIC STRENGTH	Between terminal to cabinet 2.5KV / 1min	
RANGE OF INSULATION MEASUREMENT	0 ~ 500MΩ	
MEASUREMENT CIRCUIT	1P / 3Phase non grounded AC line	
RATING	Continuity	
AMBIENT TEMPERATURE	-20°C ~ +55°C	
RANGE OF STORAGE TEMPERATURE	-40°C ~ +80°C	
MATERIAL OF CABINET	PC(Flame retardant) UL94 V-O / TRIREX3025G10 / G / F(Reinforced)	