




The Honor Brand

A Key Management System

01

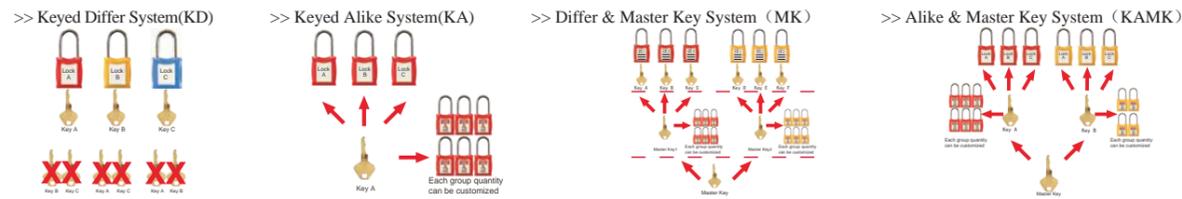

B Products (Lockout & Tagout)

01. Safety Padlocks

02



02. Safety Tags And Labels

10



03. Lockout Hasps

12



04. Cable System Lockouts

15



05. Valve Lockout Devices

17



06. Electrical Switch Lockouts

22



07. Gas Cylinder/Source Lockouts

32



08. Lockout / Tagout / Key & Document Stations

34




Unique Key Management System

Establish a safety and manageability system can satisfy your Lockout/Tagout requirements

>> Keyed Differ System(KD)

- Each lock has only one key. The key can not match other locks.

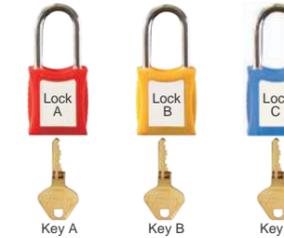


Advantage

Your lock cannot be opened by another lock.



>> Keyed Alike System(KA)

- The keys within a designated group fit each other's locks and any one or more keys fit all padlocks in the group. Multiple groups can be custom-made and the keys in different groups do not mutually fit.

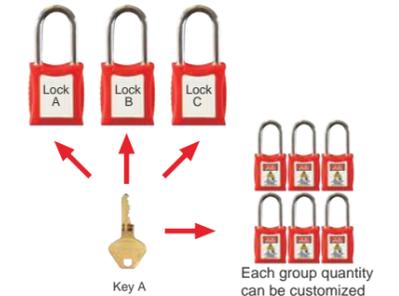


Advantage

You just need to take a key.




>> Differ & Master Key System (MK)

- Each lock in a designated group has only one key. Keys do not mutually fit but a master key can open all the safety padlocks in the group. Multiple groups can be custom-made. The master key does not fit the locks in a different group but the general master key at a higher level can be designated to fit all padlocks in all groups.

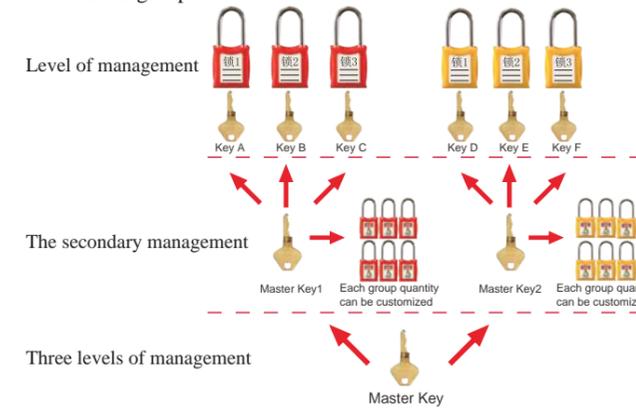

>> Alike & Master Key System (KAMK)

- After multiple groups of keyed alike series are determined, if you need to designate the supervisor at a higher level to fit all groups, you may add a master key.

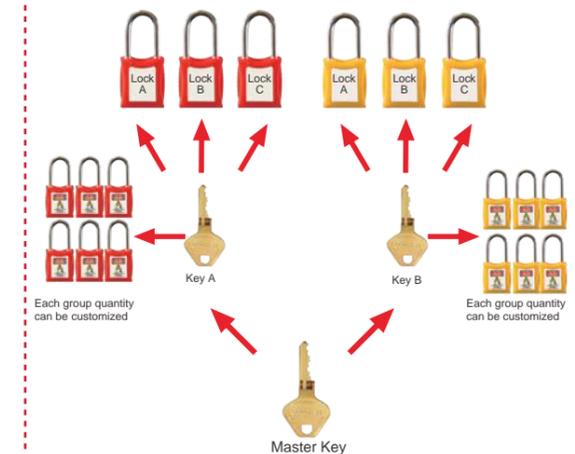

Padlock Order Details

- Confirm the padlock item number, quantity, material, and size : a. Light thermal plastic insulated safety padlock : S02
- Confirm the key system (referring to the key system introduction and indicated picture) : a. Keyed Differ-Standard Padlock (KD) b. Keyed Alike Series (KA) c. Master Key Series (MK) d. Alike & Master Key Series (KAMK)
- Language Version : All English or Customized Language
- Shackle Height : Default Height or Customized (has the quantity requirement)
- Padlock Body Colour : as customers-made
- A superposition of the code according to the above five steps in sequence, encoding the final products constitutes a padlock. According to this product encoding can consult the SMART-LOCK related sales customization and inquiry.



201 Series Engineering Plastic Safety Padlock

Widely used for chemical, beverage, electric, automobile and other industries.

Hot Sale

Stainless Steel Shackle, Steel Shackle, Nylon Shackle, Steel Cable Shackle

Xenoy® Durable Non-Conductive Lock Body, Withstand Temperature From -57°C To 177°C, Customizable Flame Retardant Lock Body

Internal structure (all metal parts): The use of rust-proof material, compared to the traditional plastic parts more durable wear, with a higher precision, longer life

All Brass Cylinder(7 hole): Anti-Rust, Anti-Oxidation, High Accuracy And Low Efficiency, More Numbers Of Management

All Brass Key(Chrome Plated) : Resistance Of Chemical, Extreme Temperatures And Uv Rays

Key Retaining Feature: The Key Can Be Removed Only If The Padlock Locked (Has The "LOCK OUT" Logo)

With Rewritable Warning Labels

201LRED, 201RED, 202RED, 202YLW, 202BLU, 202LRED, 205RED, 205BLU, 205GEN, 205YLW

Engineering Plastic Safety Padlock, Insulated, Antimagnetic, Explosion-Proof Safety Padlock, Steel Cable Safety Padlock

- Specially designed for LOCKED/TAGOUT;
- Made of unique engineering plastics,standard and robust,meet the OSHA1910.147 regulations;
- Anti-ultraviolet,not contain silicon,UV resistance and corrosion resistance;
- Specially design of the double slot key to meet the requirements of multi-level management, KD/KA/MK or KAMK available;
- 8 colours or can be selected;
- Key retaining feature:the key can be removed only if the padlock locked.

Engineering Plastics Safety Padlock Advantage Feature

- 1.30000 PCS Keyed Differ mutual opening rate 3/1000;
- 2.2500 groups KA system can be available;
- 3.2500 PCS Master Key Groups;
- 4.Lock body can be customized flame retardant material, called FR series;Structure can choose the design of automatic rebound like 211 series.

A variety of specifications for choice

Type 1.Lock body flame retardant test (FR201RED)



Type 2.General Safety Padlock No Automatic Springback




Type 3.Automatic Springback Lock Automatic Springback



01 201/201L Series Engineering Plastic Safety Padlock

Suitable for confined space, e.g. : chemical, military, oil and electric power industry

- 1.Durable, lightweight and insulated Xenoy® material lock body; 6.3mm diameter metal shackle; resistant to corrosion;
- 2.38mm & 76mm shackle height available;
- 3.Only 95g durable lock body, easy to be carried, none silicon, UV resistance and corrosion resistance;
- 4.With strong, durable and zinc plated steel lock shackle, which has excellent anti rust ability, and can increase the hardness of the lock shackle.
- 5.Made of copper alloy material lock cylinder , can effectively eliminate the metal friction sparks;
- 6.Key retaining feature: the key can be removed only if the padlock locked;
- 7.Specially design of the double slot key to meet the requirements of multi-level management, KD, KA, MK or KAMK available;

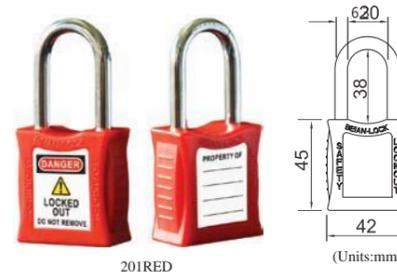

Item NO.	Product Name	Shackle Material	Series Choose	Description
Standard:a key corresponding to a padlock (if two keys to be customized,please contact sales)				
201RED	Steel Engineering Plastics Safety Padlock(red)	steel A3	KD KA MK KAMK	"S" stands for Stainless Steel Shackle "FR" stands for flame retardantsafety padlocks "211"stands for Steel automatic springback structure Example 1:Steel Shackle Engineering Plastic Safety Padlock(red)model:201REDS Example 2:Steel automatic springback safety padlock (yellow) model:211YLW
201ORJ	Steel Engineering Plastics Safety Padlock(orange)			
201YLW	Steel Engineering Plastics Safety Padlock(yellow)			
201GEN	Steel Engineering Plastics Safety Padlock(green)			
201BLU	Steel Engineering Plastics Safety Padlock(blue)			
201BLK	Steel Engineering Plastics Safety Padlock(black)			
201WHT	Steel Engineering Plastics Safety Padlock(white)			
201PRP	Steel Engineering Plastics Safety Padlock(purple)			
For custom Management Series / marking / labeling in advance to communicate with sales, to be customized.				


Item NO.	Product Name	Shackle Material	Series Choose	Description
Standard:a key corresponding to a padlock (if two keys to be customized,please contact sales)				
201LRED	Steel Long Shackle Engineering Plastics Safety Padlock(red)	Steel A3	KD KA MK KAMK	"S" stands for Stainless steel Shackle "211L"stands for Automatic springback structure of long steel shackle Example 1:Steel Long Shackle Engineering Plastic Safety Padlock(red)model:201LREDS
201LORJ	Steel Long Shackle Engineering Plastics Safety Padlock(orange)			
201LYLW	Steel Long Shackle Engineering Plastics Safety Padlock(yellow)			
201LGEN	Steel Long Shackle Engineering Plastics Safety Padlock(green)			
201LBLU	Steel Long Shackle Engineering Plastics Safety Padlock(blue)			
201LBLK	Steel Long Shackle Engineering Plastics Safety Padlock(black)			
201LWHT	Steel Long Shackle Engineering Plastics Safety Padlock(white)			
201LPRP	Steel Long Shackle Engineering Plastics Safety Padlock(purple)			
For custom Management Series / marking / labeling in advance to communicate with sales, to be customized.				



02 202/202L Series Insulated, Antimagnetic, Explosion-Proof Safety Padlock

Suitable for confined space, e.g. : chemical, military, oil and electric power industry

1. 202 Series: 6.3mm diameter metal shackle, 38/76mm height nylon shackle, Zenex™ Engineering plastic synthesized material lock body;
- 2.All parts are explosion-proof, antimagnetic, non-conductive -- plastic, copper or brass;
- 3.Only 68g durable lock body, easy to be carried, none silicon, UV resistance and corrosion resistance;
- 4.Made of copper alloy material lock cylinder , can effectively eliminate the metal friction sparks;
- 5.Nylon shackle: not only completely insulated, but also greatly increase the hardness of the lock shackle;
- 6.Specially design of the double slot key to meet the requirements of multi-level management, KD, KA, MK or KAMK available;

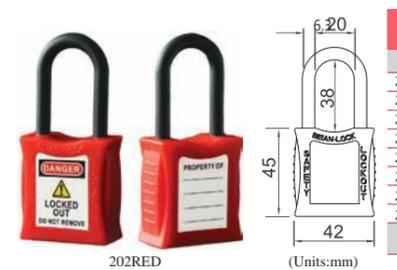

Item NO.	Product Name	Shackle Material	Series Choose	Description
Standard:a key corresponding to a padlock (if two keys to be customized,please contact sales)				
202RED	Insulated,antimagnetic,explosion-proof safety padlock(red)	nylon fiber increase the loading-bearing of lockshackle(pull test>50lbs)	KD KA MK KAMK	"212" stands for Automatic spring back structure of insulating shackle Example 1:Insulating shackle automatic rebound safety padlock (red)model:212LRED
202ORJ	Insulated,antimagnetic,explosion-proof safety padlock(orange)			
202YLW	Insulated,antimagnetic,explosion-proof safety padlock(yellow)			
202GEN	Insulated,antimagnetic,explosion-proof safety padlock(green)			
202BLU	Insulated,antimagnetic,explosion-proof safety padlock(blue)			
202BLK	Insulated,antimagnetic,explosion-proof safety padlock(black)			
202WHT	Insulated,antimagnetic,explosion-proof safety padlock(white)			
202PRP	Insulated,antimagnetic,explosion-proof safety padlock(purple)			
For custom Management Series / marking / labeling in advance to communicate with sales, to be customized.				





03 205/206 Series Steel Cable Padlock

Applicable to the proximity of the switch electrical lockout, convenient to be centralized management.

1. Durable, lightweight and insulated Xenoy® material lock body;
2. 3mm steel cable lock shackle, can be locked nearby the electrical appliances or other switches at the same time, save padlock quantity and space, to facilitate centralized management; 150mm cable length.
3. Made of copper alloy material lock cylinder, can effectively eliminate the metal friction sparks;
4. Key retaining feature: the key can be removed only if the padlock locked;
5. Specially design of the double slot key to meet the requirements of multi-level management, KD, KA, MK or KAMK available;

Item NO.	Product Name	Shackle Material	Series Choose	Description
Standard: a key corresponding to a padlock (if two keys to be customized, please contact sales)				
205RED	steel cable safety padlock(red)	304 stainless steel cable(encapsulated)	KD KA MK KAMK	"206" stands for steel cable surface encapsulated Example: steel cable engineering plastic safety padlock encapsulated(red) model: 206RED
205ORJ	steel cable safety padlock(orange)			
205YLW	steel cable safety padlock(yellow)			
205GEN	steel cable safety padlock(green)			
205BLU	steel cable safety padlock(blue)			
205BLK	steel cable safety padlock(black)			
205WHT	steel cable safety padlock(white)			
205PRP	steel cable safety padlock(purple)			
For custom Management Series / marking / labeling in advance to communicate with sales, to be customized				



04 S02 Series Light Thermal Plastic Safety Padlock

Suitable for marine & outdoor use, and small aperture applications

1. Durable, lightweight, insulated and resistant to corrosion light thermal plastic lock body;
2. Shackle diameter 4.5mm, suitable for small aperture lockout point;
3. Made of copper alloy material lock cylinder, can effectively eliminate the metal friction sparks;
4. Key retaining feature: the key can be removed only if the padlock locked;
5. Specially design of the double slot key to meet the requirements of multi-level management, KD, KA, MK or KAMK available;

Item NO.	Product Name	Shackle Material	Series Choose	Description
Standard: a key corresponding to a padlock (if two keys to be customized, please contact sales)				
S02RED	light thermal plastic insulated safety padlock(red)	nylon fiberincrease the loading-bearing of lock shackle	KD KA MK KAMK	"S01" stands for Steel Shackle Example 1: Light thermal plastic steel safety padlock (red) model: S01RED
S02ORJ	light thermal plastic insulated safety padlock(orange)			
S02YLW	light thermal plastic insulated safety padlock(yellow)			
S02GEN	light thermal plastic insulated safety padlock(green)			
S02BLU	light thermal plastic insulated safety padlock(blue)			
S02BLK	light thermal plastic insulated safety padlock(black)			
S02WHT	light thermal plastic insulated safety padlock(white)			
S02PRP	light thermal plastic insulated safety padlock(purple)			
For custom Management Series / marking / labeling in advance to communicate with sales, to be customized				



S01/S02/S03 Light Thermal Plastic Safety Padlock

Suitable for marine & outdoor use, and small aperture applications.

Hot Sale

With Rewritable Warning Labels

Steel Shackle, Nylon Shackle, Steel Cable Shackle

Xenoy® Durable Non-Conductive Lock Body, Withstand Temperature From -57°C To 177°C/ Customizable Flame Retardant Lock Body

All Brass Cylinder(5 hole): Anti-Rust, Anti-Oxidation, High Accuracy And Low Efficiency, More Numbers Of Management

All Brass Key(Chrome Plated) : Resistance Of Chemical, Extreme Temperatures And Uv Rays

Key Retaining Feature: The Key Can Be Removed Only If The Padlock Locked (Has The "LOCK OUT" Logo)



05 S03 Series Light Thermal Steel Cable Safety Padlock

Applicable to the proximity of the switch electrical lockout, convenient to be centralized management.

1. Durable, lightweight and insulated Xenoy® material lock body;
2. 3mm steel cable lock shackle, can be locked nearby the electrical appliances or other switches at the same time, save padlock quantity and space, to facilitate centralized management; 200mm cable length.
3. Made of copper alloy material lock cylinder, can effectively eliminate the metal friction sparks;
4. Key retaining feature: the key can be removed only if the padlock locked;
5. Specially design of the double slot key to meet the requirements of multi-level management, KD, KA, MK or KAMK available;


Item NO.	Product Name	Shackle Material	Series Choose
Standard: a key corresponding to a padlock (if two keys to be customized, please contact sales)			
S03RED	light thermal steel cable safety padlock(red)	304 stainless steel cable (encapsulated)	KD--keyed differ system KA--keyed alike system MK--differ&master key system KAMK--alike&master key system
S03ORJ	light thermal steel cable safety padlock(orange)		
S03YLW	light thermal steel cable safety padlock(yellow)		
S03GEN	light thermal steel cable safety padlock(green)		
S03BLU	light thermal steel cable safety padlock(blue)		
S03BLK	light thermal steel cable safety padlock(black)		
S03WHT	light thermal steel cable safety padlock(white)		
S03PRP	light thermal steel cable safety padlock(purple)		
For custom Management Series / marking / labeling in advance to communicate with sales, to be customized			





101/102 Series Engineering Plastic Safety Padlock

Designed for Lockout/Tagout, the widely used safety padlock.

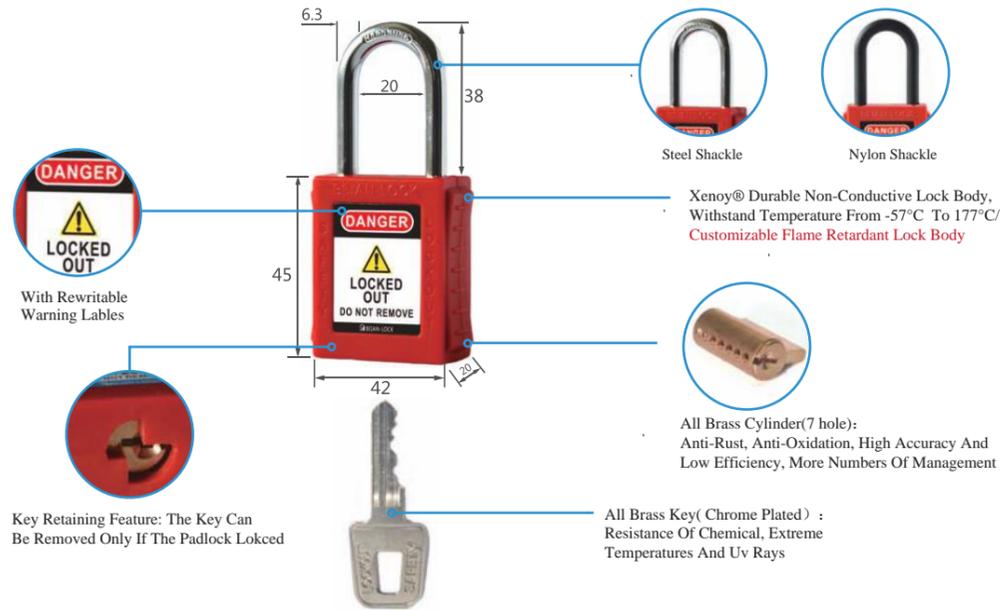


101 Series Engineering Plastics Safety Padlock Advantage Feature:

- 1.30000 PCS Keyed Differ mutual opening rate 3/1000;
2. 8000 groups KA system can be available,the number of each group is not limited;
3. 8000 PCS Master Key Groups.

06 101/101L Series Engineering Plastic Safety Padlock


Suitable for confined space, e.g. : chemical, military, oil and electric power industry.

- 1.Durable, lightweight and insulated Xenoy® material lock body; 6.3mm diameter metal shackle; resistant to corrosion;
- 2.38mm & 76mm shackle height available;
- 3.Only 105g durable lock body, easy to be carried, none silicon, UV resistance and corrosion resistance;
- 4.With strong, durable and zinc plated steel lock shackle, which has excellent anti rust ability, and can increase the hardness of the lock shackle.
- 5.Made of copper alloy material lock cylinder , can effectively eliminate the metal friction sparks;
- 6.Key retaining feature: the key can be removed only if the padlock locked;
- 7.Specially design of the double slot key to meet the requirements of multi-level management, KD, KA, MK or KAMK available;

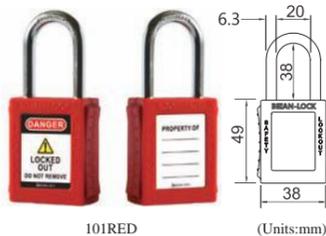

Item NO.	Product Name	Shackle Material	Series Choose	Description
Standard:a key corresponding to a padlock (if two keys to be customized,please contact sales)				
101RED	Steel Engineering Plastics Safety Padlock(red)	steel A3	KD KA MK KAMK	"S" stands for stainless steel shackle Example 1:Steel Shackle Engineering Plastic Safety Padlock(red)model:101REDS
101OR	Steel Engineering Plastics Safety Padlock(orange)			
101YLW	Steel Engineering Plastics Safety Padlock(yellow)			
101GEN	Steel Engineering Plastics Safety Padlock(green)			
101BLU	Steel Engineering Plastics Safety Padlock(blue)			
101BLK	Steel Engineering Plastics Safety Padlock(black)			
101WHT	Steel Engineering Plastics Safety Padlock(white)			
101PRP	Steel Engineering Plastics Safety Padlock(purple)			
For custom Management Series / marking / labeling in advance to communicate with sales, to be customized.				


Item NO.	Product Name	Shackle Material	Series Choose	Description
Standard:a key corresponding to a padlock (if two keys to be customized,please contact sales)				
101LRED	Steel Long Shackle Engineering Plastics Safety Padlock(red)	Steel A3	KD KA MK KAMK	"S" stands for stainless steel shackle Example 1:Steel Long Shackle Engineering Plastic Safety Padlock(red)model:101LREDS
101LOR	Steel Long Shackle Engineering Plastics Safety Padlock(orange)			
101LYLW	Steel Long Shackle Engineering Plastics Safety Padlock(yellow)			
101LGEN	Steel Long Shackle Engineering Plastics Safety Padlock(green)			
101LBLU	Steel Long Shackle Engineering Plastics Safety Padlock(blue)			
101LBLK	Steel Long Shackle Engineering Plastics Safety Padlock(black)			
101LWHT	Steel Long Shackle Engineering Plastics Safety Padlock(white)			
101LPRP	Steel Long Shackle Engineering Plastics Safety Padlock(purple)			
For custom Management Series / marking / labeling in advance to communicate with sales, to be customized.				

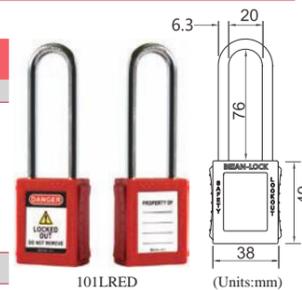

07 102/102L Series Insulated, Antimagnetic, Explosion-Proof Safety Padlock

Suitable for confined space, e.g. : chemical, military, oil and electric power industry

1. 102 Series: 6.3mm diameter metal shackle, 38mm height nylon shackle, Xenoy™ Engineering plastic synthesized material lock body;
- 2.All parts are explosion-proof, antimagnetic, non-conductive -- plastic, copper or brass;
- 3.Only 87g durable lock body, easy to be carried, none silicon, UV resistance and corrosion resistance;
- 4.Made of copper alloy material lock cylinder , can effectively eliminate the metal friction sparks;
- 5.Nylon shackle: not only completely insulated, but also greatly increase the hardness of the lock shackle;
- 6.Specially design of the double slot key to meet the requirements of multi-level management, KD, KA, MK or KAMK available;

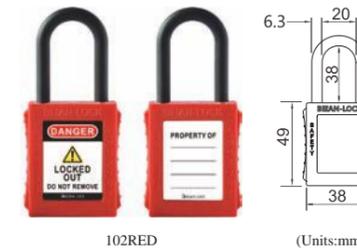

Item NO.	Product Name	Shackle Material	Series Choose
Standard:a key corresponding to a padlock (if two keys to be customized,please contact sales)			
102RED	Insulated,antimagnetic,explosion-proof safety padlock(red)	nylon fiber increase the loading-bearing of lock shackle(pull test>50lbs)	KD KA MK KAMK
102OR	Insulated,antimagnetic,explosion-proof safety padlock(orange)		
102YLW	Insulated,antimagnetic,explosion-proof safety padlock(yellow)		
102GEN	Insulated,antimagnetic,explosion-proof safety padlock(green)		
102BLU	Insulated,antimagnetic,explosion-proof safety padlock(blue)		
102BLK	Insulated,antimagnetic,explosion-proof safety padlock(black)		
102WHT	Insulated,antimagnetic,explosion-proof safety padlock(white)		
102PRP	Insulated,antimagnetic,explosion-proof safety padlock(purple)		
For custom Management Series / marking / labeling in advance to communicate with sales, to be customized.			

08 501 Series Steel Cable Padlock

Designed for Lockout/Tagout, Widely Used Safety Padlock

- 1.Durable, lightweight and insulated Xenoy® material lock body; 6mm diameter metal shackle; resistant to corrosion;
- 2.38mm & 76mm shackle height available;
- 3.With strong, durable and zinc plated steel lock shackle, which has excellent anti rust ability, and can increase the hardness of the lock shackle;
- 4.Made of copper alloy material lock cylinder , can effectively eliminate the metal friction sparks;
- 5.Waterproof lock body labels: can be written "Danger" and "Owner": Long body design can increase writing content, or you can add a personal picture to be used by individual persons, and make sure the safety padlock management more strict;
- 6.Key retaining feature: the key can be removed only if the padlock locked;
- 7.Specially design of the double slot key to meet the requirements of multi-level management, KD, KA, MK or KAMK available;


Item NO.	Product Name	Shackle Material	Series Choose	Description
Standard:a key corresponding to a padlock (if two keys to be customized,please contact sales)				
501RED	Engineering Plastics Long Body Safety Padlock(red)	steel A3	KD KA MK KAMK	"L" stands for steel long shackle "S" stands for stainless steel shackle "502" stands for insulated shackleretardantsafety "502L" stands for insulated long body shackle Example 1:Engineering Plastic Long Body Safety Padlock(red)model:501LRED Example 2:Engineering Plastics insulated long shackle Safety Padlock(yellow) model:502YLW
501OR	Engineering Plastics Long Body Safety Padlock(orange)			
501YLW	Engineering Plastics Long Body Safety Padlock(yellow)			
501GEN	Engineering Plastics Long Body Safety Padlock(green)			
501BLU	Engineering Plastics Long Body Safety Padlock(blue)			
501BLK	Engineering Plastics Long Body Safety Padlock(black)			
501WHT	Engineering Plastics Long Body Safety Padlock(white)			
501PRP	Engineering Plastics Long Body Safety Padlock(purple)			
For custom Management Series / marking / labeling in advance to communicate with sales, to be customized.				




09 Sparkproof Aluminum Safety Padlock

Suitable for chemical & automobile industry

- 1.Designed for Lockout/Tagout, durable & lightweight aluminum padlock, Resistance to chemical corrosion, extreme temperature, and UV rays;
- 2.The solid structure of the lock body can withstand a strong external force, not containing silicon material;
- 3.Meet multi-level management requirements, KD, KA, MK and KAMK available;
- 4.Lock shackle mady by the strong and durable zinc plated steel material, electroplated surface, superior anti-rust, and can increase the hardness of the lock shackle;

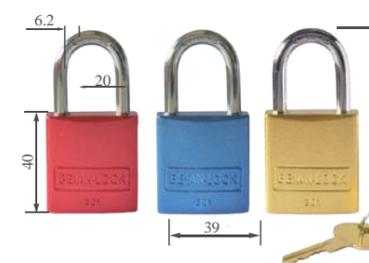

Item NO.	Product Name	Series Choose	Description
Standard:two keys corresponding to a padlock			
301RED	Engineering Plastics Long Body Safety Padlock(red)	KD/KA/ MK/KAMK	Lock body is made of sparkproof aluminum,and lock shackle is steel chrome,and cylinder has a rebound effect.
301BLU	Engineering Plastics Long Body Safety Padlock(yellow)		
301YLW	Engineering Plastics Long Body Safety Padlock(blue)		
For custom Management Series / marking / labeling in advance to communicate with sales, to be customized.			



Safety Padlocks

Create The First-class LOTO Brand



10 All Brass Safety Padlock

Superior corrosion resistance, anti-rust, hot selling products used in adverse circumstances.

- 1.Lock body & shackle are made of solid copper alloy,waterproof and durable;
- 2.The lock cylinder made of copper alloy material, with highly anti picking performance , excellent anti-tamper,anti -impact;
- 3.Superior brass materials, advanced produce technology,very suitable used in the lockout / tagout system;
- 4.Meet multi-level management requirements, KD, KA,MK and KAMK available;
- 5.3 Series available for selection.



ITEM NO.	Description	Shackle Size(mm)			
		A:	B:	C:	D:
Width: 32mm. Height: 27mm, All Brass Lock Body. All Brass Short Shackle					
6332	KD--keyed differ system	32	15	5	12.2
6332KA	KA--keyed alike system	32	15	5	12.2
6332MK	MK--differ&master key system	32	15	5	12.2
6332KAMK	KAMK--alike&master key system	32	15	5	12.2
Width: 32mm. Height: 27mm,All Brass Lock Body. All Brass Short Shackle					
6432	KD--keyed differ system	32	32	4.7	12.5
6432KA	KA--keyed alike system	32	32	4.7	12.5
6432MK	MK--differ&master key system	32	32	4.7	12.5
6432KAMK	KAMK--alike&master key system	32	32	4.7	12.5
Width: 38mm. Height: 32mm,All Brass Lock Body. All Brass Short Shackle					
6438	KD--keyed differ system	38	38	6.3	12.8
6438KA	KA--keyed alike system	38	38	6.3	12.8
6438MK	MK--differ&master key system	38	38	6.3	12.8
6438KAMK	KAMK--alike&master key system	38	38	6.3	12.8
Width: 32mm. Height: 27mm, All Brass Lock Body. All Brass Short Shackle					
6532	KD--keyed differ system	32	51	4.7	12.2
6532KA	KA--keyed alike system	32	51	4.7	12.2
6532MK	MK--differ&master key system	32	51	4.7	12.2
6532KAMK	KAMK--alike&master key system	32	51	4.7	12.2
Width: 32mm. Height: 27mm, All Brass Lock Body. All Brass Short Shackle					
6538	KD--keyed differ system	38	64	6.3	12.5
6538KA	KA--keyed alike system	38	64	6.3	12.5
6538MK	MK--differ&master key system	38	64	6.3	12.5
6538KAMK	KAMK--alike&master key system	38	64	6.3	12.5

Lock Body Colours

- SMART-LOCK provide 8 colours body,Can be used by multi-department without conflict;
- There are different types of lockout/tagout locks according to the different equipments and powers types, The duty officer will be respectively to give out workers and himself a padlock. Usually, the color of these locks are marked as follows (different companies may have different rules):

- Green- Instrument and Electrical Department
- Purple-Water conservancy supervision department
- Blue- Mechanical Maintenance Department
- Yellow-Safety Management Department
- Red- Operation Department
- White-Director and Managers
- Black- The Contractor
- Orange-Others

Padlock Labels

SMART-LOCK can provide customized service for you with fast and easy identification of the padlocks;

- Labels: can be written the workers name, adding the personal photo, ID ,department and company e.g.;
- Photo ID make the safety padlock has special stickers , can immediately identify owners when used in factory.



Traceability of Keys

- SMART-LOCK can provide customized service for you with fast and easy identification of the padlocks;
- Key encoding customize: each key has a unique serial number to ensure that's no any duplication of keys, provide the customers with unique user ID number, and can encoding the serial number if customers has the demands;




11 Steel Laminated Safety Padlock

Suitable for special circumstances & requirements.

- 1.Nickel plated steel lock body, secure and economy, the strengthening structure of the laminated lock can withstand strong external force. A3 steel shackle, superior anti rust;
- 2.The lock cylinder made of copper alloy material, with highly anti picking performance , excellent anti-tamper, anti -impact;
3. Meet multi-level management requirements, KD, KA, MK and KAMK available;
- 4.Engrave numbers on lock bottom and key, Independent ID number;
- 5.7 Item types available.



ITEM NO.	Description	Shackle Size (mm)			
		C:	D:	E:	F:
Width: 30mm. Height: 26.5mm,lock body. steel shackle					
430RED	KD	14.5	17	17.5	5
430LRED	KD	14.5	39.5	17.5	5
430KARED	KA	14.5	17	17.5	5
430LKARED	KA	14.5	39.5	17.5	5
430MKRED	MK	14.5	17	17.5	5
430KAMKRED	KAMK	14.5	17	17.5	5
Width: 40mm. Height: 33mm,lock body. steel shackle					
440RED	KD	20.5	24	22.5	6
440LRED	KD	20.5	53	22.5	6
440KARED	KA	20.5	24	22.5	6
440LKARED	KA	20.5	53	22.5	6
440MKRED	MK	20.5	24	22.5	6
440KAMKRED	KAMK	20.5	24	22.5	6
Width: 45mm. Height: 33mm,lock body. steel shackle					
445RED	KD	21	25.5	23.5	7
445LRED	KD	21	60	23.5	7
445KARED	KA	21	25.5	23.5	7
445LKARED	KA	21	60	23.5	7
445MKRED	MK	21	25.5	23.5	7
445KAMKRED	KAMK	21	25.5	23.5	7
Width: 50mm. Height: 37.5mm,lock body. steel shackle					
450RED	KD	24.5	28.5	26	8
450KARED	KA	24.5	28.5	26	8
450MKRED	MK	24.5	28.5	26	8
450KAMKRED	KAMK	24.5	28.5	26	8

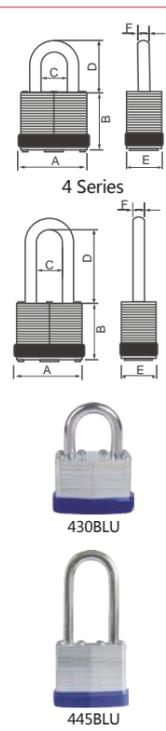

Laser Engraving Service

A way to make your safety padlock personalized and durable at a long time.

- Available to aluminium padlock and Xenoy® Engineering plastics padlock;
- Laser names, marks or key codes, you can select the important information engraved on the padlock;
- Engraving the information on the front, side or back of the locks by laser;
- Contact your dealer or SMART-LOCK to get the order and price information.



LASER WORDS OR SIMPLE PICTURES

Waterproof And Dustproof Rubber Sleeve

Suitable for a rainy day, such as dust, dust environment(For the 201 series)



Item NO.	Product Name	Description
Waterproof And Dustproof Rubber Sleeve:Full Transparency		
DP201RED	Waterproof and dustproof Steel Engineering Plastics Safety Padlock(red)	"DP" stands for Waterproof and dustproof Example 1:Waterproof and dustproof Steel Engineering PlasticsSafety Padlock(red),model:DP201RED
DP201OR	Waterproof and dustproof Steel Engineering Plastics Safety Padlock(orange)	
DP201YLW	Waterproof and dustproof Steel Engineering Plastics Safety Padlock(yellow)	
DP201GEN	Waterproof and dustproof Steel Engineering Plastics Safety Padlock(green)	
DP201BLU	Waterproof and dustproof Steel Engineering Plastics Safety Padlock(blue)	
DP201BLK	Waterproof and dustproof Steel Engineering Plastics Safety Padlock(black)	
DP201WHT	Waterproof and dustproof Steel Engineering Plastics Safety Padlock(white)	
DP201PRP	Waterproof and dustproof Steel Engineering Plastics Safety Padlock(purple)	

For custom Management Series / marking / labeling in advance to communicate with sales, to be customized.



General purpose

The most common use of several security tags on the market, in line with OSHA standard loto.

Width: 80mm Material: PVC
Height: 148mm
Thickness: 0.42mm



Front Back
BAN-P01



Front Back
BAN-P02

Width: 75mm Material: PVC
Height: 145mm
Thickness: 0.42mm



Front Back
BAN-P03



Front Back
BAN-P04

- Use the label together with a safety padlock to boldly warn that the equipment is locked out and cannot be operated; also warn that the lockout procedure may only be cancelled by the person who performs it. When used in factories, the worker using the equipment can be identified immediately to protect his safety;
- Safety tag, is used to do the overall control of equipment to protect personnel from injury, equipment from damage;
- The 15mm diameter brass grommet is suitable for most safety padlocks on the market;
- 3 options for choice: English/Chinese/English&Chinese on front and back; made of polystyrene; surface plastic-clad.



Advanced customization: tag can be customized plastic, need to advance contact with the sales negotiations, not spot to be customized.
more waterproof, more durable



01 Other Security Tags

SMART-LOCK can provide customized services according to the customer's demand.

- Material: PVC, Stainless Steel Sheet, etc;
- Thickness: 0.3-2.5mm; Sizes can be selected by yourself;
- Printing Requirement: Customized as required by customers (Such as company logo, content, etc).



BAN-P96



BAN-P98



BAN-P99



BAN-P103



BAN-P139



BAN-P136



BAN-P137



BAN-P97



BAN-P104



BAN-P138



BAN-P100



BAN-P101



BAN-P102



Plastic-clad Effect



Pocket-type Tag

02 2-Copy Lockout Tags

suitable for use in more complicated isolation procedures; Being traceable is a very important characteristic of the tags;



BAN-P07-1

- Affix 1st copy onto the isolated point. 2nd copy can be tore out and returned to the person in charge as confirmation of completion of the isolation procedure. Both copies of the tag can be used to record lockout details thus to help achieve the traceability of the LOTO procedure;
- Upon finish of the work, the 2-copy tag can be archived as the long-term records of the work. Both copies are reusable after erased if written with a whiteboard pen;
- Material: Art Paper.

Contents on the front and back side are coincident:
Note, Do Not Operate, Isolation Reason, Authorized Personnel, Equipment Isolation Date, Location, etc.

ITEM NO.	Description
BAN-P07-1	English on front and back; overall dimensions: 265mm×100mm; 50 pcs/pack

03 Ladder Sign Tag

Suitable for all ladders and platforms

- Need regular and detailed inspections of the ladder;
- Ladder sign tag shows detailed information of ladder class and ladder state;
- Checklist is displayed on the back side;
- We recommend using a ladder sign tag to remind safety.

Contents on front:
Ref No., Class, Duty Rating, Max Static Vert Load, Application, Risk Assessed, Next ladder inspection due, Date, Signature;

Contents on back:
Notes about ladder pre-use checks and in use checks ;
Manufacturer Information: company name, website, telephone and email.

Contents on scaffold tag:
Contents: scaffold tag, NO., DO Not Use Scaffold.

ITEM NO.	Description
BAN-P21	Ladder Sign Tag
BAN-P21B	Insertion card in English for test occasions



BAN-P21B



BAN-P21



04 Professional Scaffold Record Tag

The world's leading scaffold state labeling system

- Professional scaffold record tag introduces international scaffold management concept, suitable for managing complex sites;
- New 2.0mm PVC plastic cards, suitable for complex outdoor conditions, sun-resistant and waterproof;
- With engineering ABS plastic base, anti-ultraviolet and lightweight, easy to carry.

Contents on front:
NO., position, applicant, built by, date, signature, scope, etc.

Contents on back:
Date, signature, normal or not, rail layers, scaffold-out date, etc.

Contents on tag shelf:
Contents: scaffold tag, NO., DO Not Use Scaffold.

ITEM NO.	Description
BAN-P23	Scaffold Tag
BAN-P23-1	Insertion card in English for test occasions



BAN-P23-1



BAN-P23






Safety hasps accommodate multiple lockouts on the same equipment

- Used on the energy cut-off switch;
- The equipment can not work in the maintenance;
- Equipment can be operated normally only if the last man opened the padlock;
- A variety of styles to meet the majority needs: sparkproof aluminium hasp, tamper-resistant steel hasp, non-conductive nylon hasp.

Sparkproof Hasp Lock

Suitable for confined space, e.g. : chemical, military, oil and electric power industry.

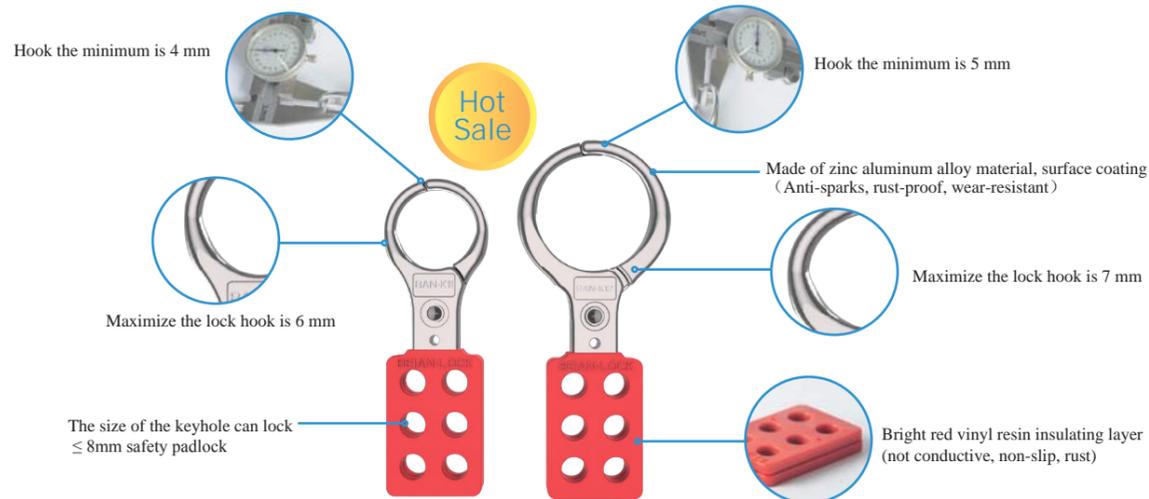


The product is more rust-proof than the steel buckle, more durable than the aluminum buckle wear.

01 Sparkproof Hasp Lock

- Surface made of zinc aluminum alloy material and applied with anti-rust plating coat and bright red vinyl resin insulated layer;
- Max. shackle diameter: 8.0mm (diameter);
- Hasp hook with the diameter of 1"(2.5cm) and 1.5" (3.8cm) provided.



ITEM NO.	Description
BAN-K11	Hasps Diameter is 1"(2.5CM)
BAN-K12	Hasps Diameter is 1.5"(3.8CM)

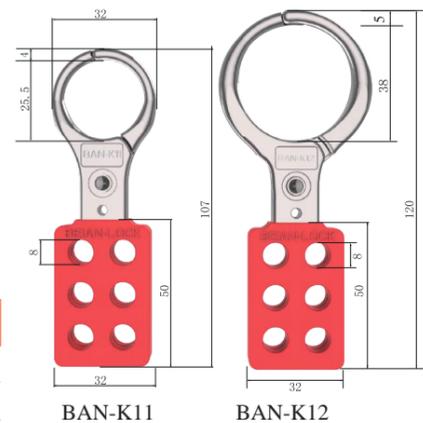

02 Steel Hasps

- Surface made of hardened steel material and applied with anti-rust plating coat and bright red vinyl resin insulated layer;
- Max. shackle diameter: 3/8"(9.5mm) (diameter);
- Hasp hook with the diameter of 1"(2.5cm) and 1.5" (3.8cm) provided.

ITEM NO.	Description
BAN-K01	Hasps Diameter is 1"(2.5CM)
BAN-K02	Hasps Diameter is 1.5"(3.8CM)

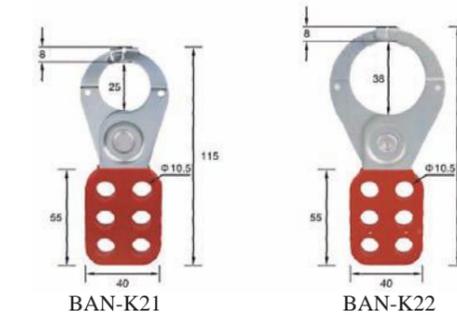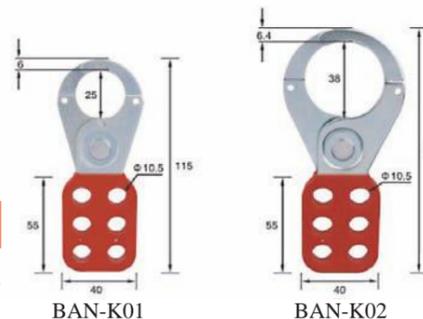

- Surface made of zinc aluminum alloy material and applied with anti-rust plating coat and bright red vinyl resin insulated layer;
- Max. shackle diameter: 8.0mm (diameter);
- Hasp hook with the diameter of 1"(2.5cm) and 1.5" (3.8cm) provided.
- The jaws can avoid the hasp self-opening.

ITEM NO.	Description
BAN-K21	Hasps Diameter is 1"(2.5CM)
BAN-K22	Hasps Diameter is 1.5"(3.8CM)

03 10 Holes Hasps

- Made of high quality aluminum plate;
- This hasp suitable for locking the various forms of sources of energies, preferably suitable for more than one worker in concurrent maintenance to perform the LOTO procedure;
- To ensure the safety when doing the LOTO procedure, it requires that workers must attach great importance to protect their own lockout hasp;
- Equip with a set of spare tags (different languages optional) at the same time that can provide the convenience of personnel safety management;
- Product weight: 110g;
- Products can be used by more than diameter 8mm lock hole;
- Made of durable environmentally friendly aluminum material with oxidation treatment surface; has red, blue, yellow 3 different colors (can be customized-colors).



ITEM NO.	Description
BAN-K64RED	Size: 163.4mm×65mm Holds up to 10 padlocks Different colours can be selected
BAN-K64YLW	
BAN-K64BLU	

04 Non-Conductive Nylon Hasps

Suitable used in electric power isolation with high requirements of anti-corrosive or explosion-proof place.

- The lock beam is made of DuPont nylon, and insulated Xenoy® material lock body;
- The insulated nylon lock hook can hold 2-4 padlocks at the maximum.
- Made of imported environmentally friendly plastic materials, anti chemical corrosion, can still work effectively in extreme environment (-50 °C to +125 °C);



ITEM NO.	Description
BAN-K44	Lock beam diameter is 3mm
BAN-K45	Lock beam diameter is 6mm



Create The First-class LOTO Brand



Non-Conductive Nylon Hasps(BAN-K48)


- Improved version of the K41/K42/43 of insulated nylon lockout hasp;
- Has the same function, smaller size and more easily to be carried;
- Identification label included;
- Nylon hook diameter 3mm.

ITEM NO.	Description
BAN-K48	hold 3 padlocks at the maximum



Non-Conductive Nylon Hasps(BAN-K41)


- Made of imported environmentally friendly plastic materials, anti chemical corrosion, can still work effectively in extreme environment (-50 °C to +125 °C) ;
- Hasp lockhole diameter is 8mm, available used by the diameter less than 8mm lockout devices;
- The insulated nylon lock hook can hold 3-6 padlocks at the maximum;
- Locked mode: up and down push pull open.

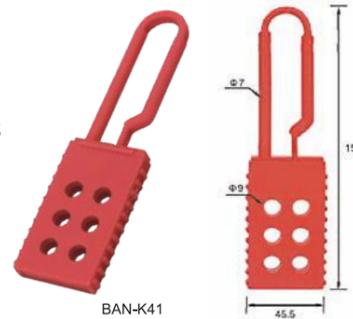

ITEM NO.	Description
BAN-K41	hold 6 padlocks at the maximum

Non-Conductive Nylon Hasps(BAN-K42)

- Made of imported environmentally friendly plastic materials, anti chemical corrosion, can still work effectively in extreme environment (-50 °C to +125 °C) ;
- Hasp lockhole diameter is 8mm, available used by the diameter less than 8mm lockout devices;
- The insulated nylon lock hook can hold 3-6 padlocks at the maximum.
- Locked mode: up and down push pull open.

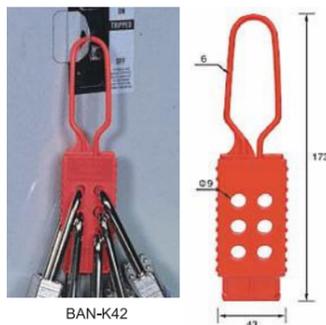

ITEM NO.	Description
BAN-K42	hold 6 padlocks at the maximum

Non-Conductive Nylon Hasps(BAN-K43)

- Made of imported environmentally friendly plastic materials, anti chemical corrosion, can still work effectively in extreme environment (-50 °C to +125 °C) ;
- Hasp lockhole diameter is 8mm, available used by the diameter less than 8mm lockout devices;
- The insulated nylon lock hook can hold 3-6 padlocks at the maximum;
- Locked mode: side open.



ITEM NO.	Description
BAN-K43	hold 6 padlocks at the maximum

Adjustable Steel Cable Lockouts

The cable length is 1.5 m and 1.8 m respectively to choose from, the cable diameter 4 mm.

- This is a novel and practical five-hole product.
- Imported green plastic material, resistant to chemical corrosion, can be able to work effectively in extreme environments (-50°C to +125°C).
- Five padlocks can work at the same time; Can be used in conjunction with snap locks, allowed more workers simultaneous operating
- Keyhole diameter:8mm, suitable for the locks with shackle below 8mm
- Cable core is made of stainless steel; Outer layer is made of translucent and tough plastic
- There are labels with date and signature on the product,convenience for security management.

Operation process



ITEM NO.	Description
BAN-L10	Adjustable Steel Cable Lock (Cable with black protective sleeve) a 1.5M-long steel cable (diameter: 4mm) included
BAN-L10-1	Adjustable Steel Cable Lock (Cable with black protective sleeve) a 1.8M-long steel cable (diameter: 4mm) included

Application examples




01 Five - Hole Cable Lockouts

- Main part is made from high strength polypropylene; Cable is made of galvanized steel wire.
- economical, flexible and practicable.
- The locks are suitable for the lockout of gate valves in various sizes and many electrical cabinet switch locks.
- Easy for carrying. Widely applied.
- Non-slip design, with excellent mechanical properties, heat resistance, impact resistance, high temperature resistance and insulation.

ITEM NO.	Description
BAN-L13	Steel cable diameter:3mm;length:1.2mm(custom-makeable as required by customers)

Operation process





02 Cable Lockouts

This cable lock is an ideal equipment for cable device lockout.

1. Made of anti-impact polypropylene; stainless steel internal parts;
2. With 8 holes in a diameter of 7mm, cable diameter 4mm;
3. With handle on the cable lockout, convenient for operating;
4. 2m heavy-duty steel cable wire with PVC coating provided;
5. No evident graceful degeneration is observed during the de la test at -55°C to 55°C;
6. Non-slip design, with excellent mechanical properties, heat resistance, impact resistance, high temperature resistance and insulation.




Operation process




ITEM NO.	Description
BAN-L31	Steel cable diameter is 4mm with red transparent plastic bag, and length is 0.5/1.2/2m

03 Economical Fish-Shaped Cable Lockouts

1. Main part is made from high strength polypropylene;
2. 1.8m /3m cable is composed of galvanized steel wire with polyurethane plastic coating;
3. Unique cable lock device; can hold a maximum of 6 padlocks with a diameter of 9/32"(7.1mm);
4. Non-slip design, with excellent mechanical properties, heat resistance, impact resistance, high temperature resistance and insulation.

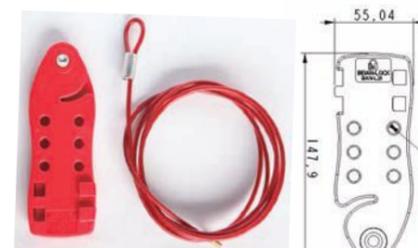


Operation process

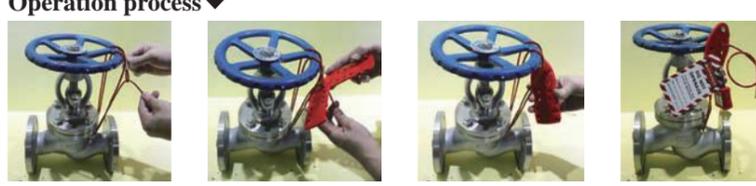

ITEM NO.	Description
BAN-L21	Steel cable diameter is 4mm with red transparent plastic bag, and length is 0.5/1.2/2m

04 Hasp Cable Wire Combination Lockouts

1. This products contains a quality hasp and 1.8-meter cable wire, which enables users to easily create a LOTO procedure and isolate many types of energy sources;
2. When used without the cable, the equipment becomes a safety hasp which can hold 6 padlocks at the maximum;
3. When used together with the cable, the equipment is a multifunctional cable lockout device which can allow for a single authorized staff member or a maximum of six authorized staff members for group lockout/tagout operation;
4. When the cable is used, this device is suitable for many applications, including the application in electrical cut-off, large gate valves and even in the locking device of the steering wheel of a forklift.

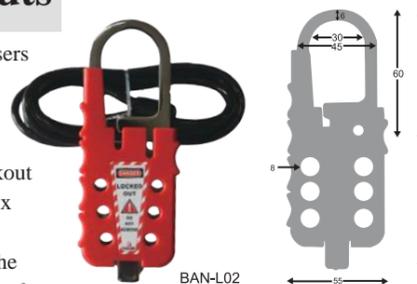


ITEM NO.	Description
BAN-L02	Steel cable diameter is 4mm with red transparent plastic bag, and length is 0.5/1.2/2m



Adjustable Butterfly Valve Lockouts (BAN-F64)

Widely used in chemical, beverage, electric, automobile and other industries.

1. Made of good-quality high-strength thermal plastics resistable to high temperature. usable in an environment at 180°C at the highest;
2. Good chemical property; resistant to oil stains and chemical product corrosions;
3. Four holes for locking according to the extended heights of the handle; Locking effect will be the best if use with the cable lockouts.

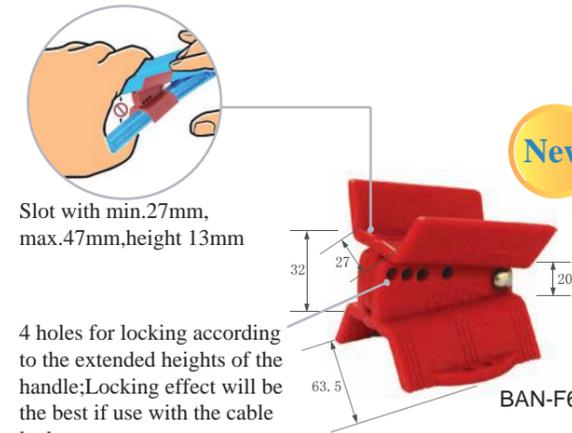

Slot with min. 27mm, max. 47mm, height 13mm

4 holes for locking according to the extended heights of the handle; Locking effect will be the best if use with the cable lockouts.

Lock hole diameter is 4 mm

According to the distance between the handle of the butterfly valve.

BAN-F64

Suitable for locking out 0.8~4.5cm butterfly valves;

Operation process





01 Standard Ball Valve Lockouts (Steel)

1. Specially used to lock the right angle turning and turned off ball valves;
2. Small locks (BAN-F03) available for DN8-DN50 ball valve lockout;
3. Big locks (BAN-F04) available for DN50-DN200 ball valve lockout;
4. Made of standard A3 plate, surface treatment by high temperature spray, not easy to rust;
5. Max. valve stem width: 30.5mm; max. valve stem thickness: 7.6mm.

ITEM NO.	Description
BAN-F03	Applicable to the valve size / pipe diameter 6.4mm-25.4mm
BAN-F04	Applicable to the valve size / pipe diameter 31.8mm-76.2mm

Operation process

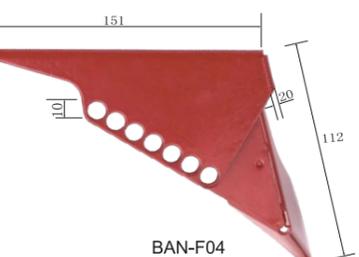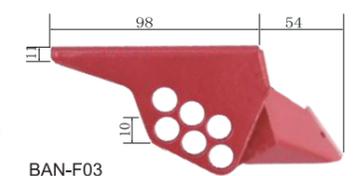




02 Adjustable Valve Lockouts

Adjustable Valve Lockouts(BAN-F01/F02)


- Made of excellent quality polypropylene material;
- Small locks (BAN-F01) suitable for pipelines with a diameter of 1.3cm to 6.4cm;
- Small locks also suitable for locking out the valves in ON position on pipelines with a diameter of 1.3cm to 3.2cm;
- Big locks (BAN-F02) suitable for pipelines with a diameter of 5cm to 20cm;
- Highly anti-crack; highly abrasion-resistant; resistible to extreme temperature variations (-46°C to 183°C).



It is available for both on and off states

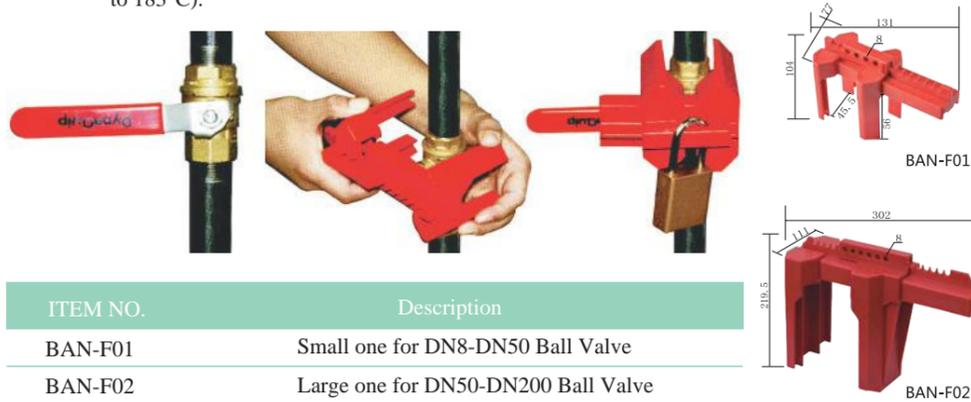

ITEM NO.	Description
BAN-F01	Small one for DN8-DN50 Ball Valve
BAN-F02	Large one for DN50-DN200 Ball Valve

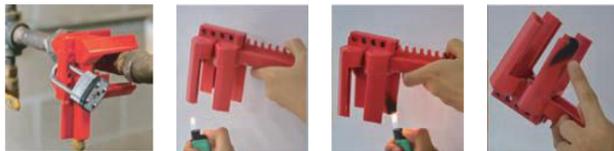


Flame Retardant Adjustable Ball Valve Lockouts (BAN-F01FR)

- With flame retardant materials, play an important role in fire protection. Suitable for high-temperature and rigorous industrial environments.

Flame Retardant Environmental Fireproof Durable

Adjustable Valve Lockouts(BAN-F05/F06/F07)

- Made of good-quality high-strength thermal plastics resistible to high temperature; usable in an environment at 180°C at the highest;
- Can lock out bidirectional rotating ball valves;
- Large-sized and small-sized products available: small-sized ones suitable for 1.3~7cm pipelines; large-sized ones for 7.3~21.5cm pipelines;
- Valve lockouts can be used for some heightened & lengthened handles if add the baffle.

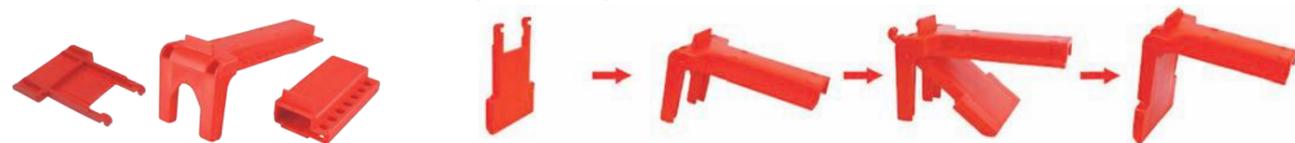

ITEM NO.	Description	Remark
BAN-F05	Available for DN8-DN50 ball valve lockouts	the front part with a baffle

■ suitable for 1.3~7cm pipelines;



ITEM NO.	Description	Remark
BAN-F06	Available for DN50-DN70 ball valve lockouts	the front part with a baffle

■ suitable for 1.3~7cm pipelines;




ITEM NO.	Description
BAN-F07	Available for DN50-DN200 ball valve lockouts

- suitable for 7.3~21.5cm pipelines;


03 Gate Valve Lockouts

Widely used in factories, architecture, chemical, electric, hospital and other industries.

- Made of strong injection-molded polypropylene material;
- Available in five sizes for choice;
- Locks with a shackle diameter of 9.5mm at the max. can be used;
- Warning labels in English available;
- Red and Full Transparent can be selected.

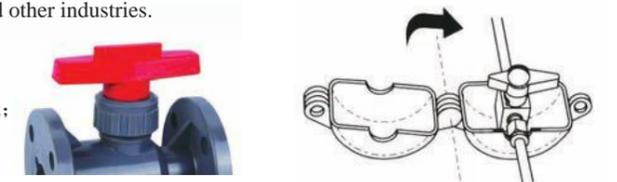

Item NO.	Description	A	B	d
BAN-F11	Stem Diameter 25mm-64mm (1"-2.5")	71.5	30.5	Φ19
BAN-F11CR				
BAN-F12	Stem Diameter 64mm-127mm (2.5"-3")	134	40	Φ44
BAN-F12CR				
BAN-F13	Stem Diameter 127mm-165mm (5"-6.5")	173	45.5	Φ63
BAN-F13CR				
BAN-F14	Stem Diameter 165mm-254mm (6.5"-10")	273	63	Φ90
BAN-F14CR				
BAN-F15	Stem Diameter 254mm-330mm (10"-13")	355	306	Φ105

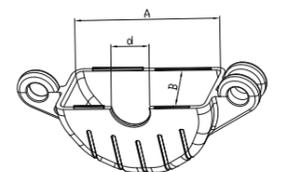

▲ Note: The hole cover can be taken apart by pliers.

▲ Note: Full transparent gate valve lockout, internal structure is clearly visible.

High Temperature Test

Note: Temperature: 180/200°C, without out of shape or melting; only surface with black coating.



04 Adjustable Valve Lockouts

- General-purpose gate valve locks suitable for 2.5cm to 16.5cm valve handles; conventional gate valve locks need three sets of locks to achieve the same effect.
- Made of sturdy and durable polypropylene material; usable in an environment at -25°C to 90°C.
- Small size and easy for carrying and keeping.
- Warning labels in English available.



ITEM NO.	Description
BAN-F16	Suitable for valve handles with a valve stem diameter of 2.5cm to 16.5cm



05 Universal Valve Lockouts

1. Made of industrial grade steel and nylon; chemical resistant capability;
2. The clamp with a new type jaw can be fastened on the closed ring; used in wide handles;
3. Also suitable for locking out large levers and T-shaped handles and other machines and equipment which are hard to be fastened;
4. 1/8" (3.2mm) insulated nylon or metal wires with antirust coating are optional as cable attachments;
5. Large all-purpose gate valve lock: suitable for handles with a max. width of 4cm (max. thickness of 2.8cm);
6. Small all-purpose gate valve lock: suitable for handles with a max. width of 2.5cm (max. thickness of 1.5cm);
7. Available for gate valves, ball valves, and butterfly valves etc.



Item NO.	Description
BAN-F31	Single-arm universal ball valve lockout
BAN-F32	Double-arm universal ball valve lockout
BAN-F33	Universal gate valve lockout
BAN-F34	Universal butterfly valve lockout
BAN-F35	Universal valve lockout




Item NO.	Description
BAN-F31	Single stop-arm all-purpose ball valve locks(BAN-F31) use the stop arm to lock out the square turn ball valve




Item NO.	Description
BAN-F32	Double stop-arm all-purpose ball valve locks(BAN-F32) use two stop arms to lock out the 3-way, 4-way or 5-way valves or lock out the valves in the throttled position for operation and control.



Item NO.	Description
BAN-F33	All-purpose gate valve locks(BAN-F33) uses the cable attachment to lock out gate valves

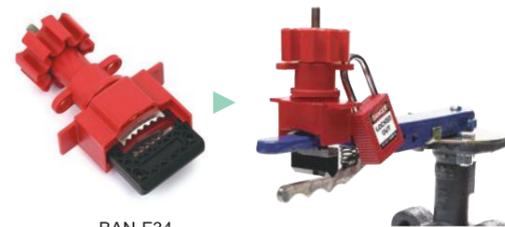

Item NO.	Description
BAN-F34	The clamping jaw of the all-purpose butterfly valve lock(BAN-F34) fasten on the disc-shaped handle to prevent the plate handle to close. The valve is thus unresettable

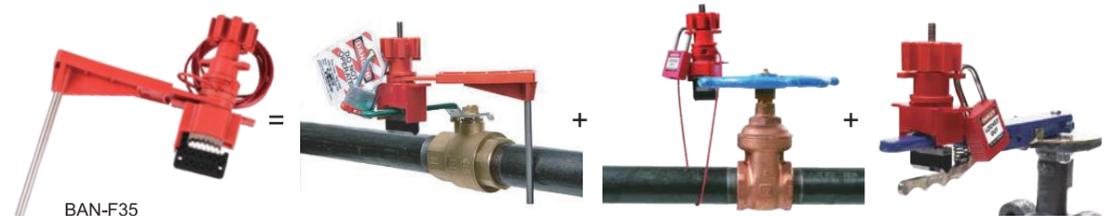

Item NO.	Description
BAN-F35	All-purpose gate valve locks(BAN-F35) need no locks of various types and in various sizes ----- you need just only one device

06 Adjustable Flange Ball Valve Lockouts

1. Used for DN8-DN125 flange ball valve which has taken apart the valve handle;
2. Available for the maximum diameter 9mm padlocks;
3. Warning labels in English available.



Item NO.	Description
BAN-F08	Made of polypropylene (PP)




07 Butterfly Valve Lockouts

1. Made of good-quality high-strength thermal plastics resistable to high temperature; usable in an environment at 180°C at the highest;
2. Suitable for locking out 0.8~4.5cm butterfly valves;
3. Good chemical property; resistant to oil stains and chemical product corrosions.



Item NO.	Description
BAN-F21	Available for 0.8cm-4.5cm Valve

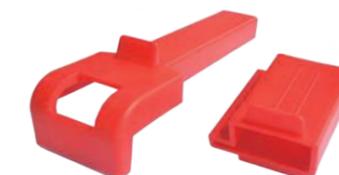

08 Plug Valve Safety Lockouts

Designed for plug valves which are hard to be locked out. The rate of application of plug valves in the industrial valve field reaches almost twenty percent.

1. Available in 4 sizes for choice; suitable for hand-operated plug valves with a diameter of 1" to 8";
2. Effectively suitable for these hard-to-be-locked-out valves;
3. Long-lived and durable and damage preventing;
4. Compact body; easy for use;
5. Usable at a temperature at -31°C - 93°C.



Item NO.	Description
BAN-F41	Suitable for valve stems with a diameter of 2.2cm
BAN-F42	Suitable for valve stems with a diameter between 2.3cm and 3.49cm
BAN-F43	Suitable for valve stems with a diameter between 4.4cm and 5.39cm
BAN-F44	Suitable for valve stems with a diameter between 5.5cm and 6.35cm




We have tested the hundreds of circuit breaker structure and model;

Including common brands, such as Allen Bradley, ABB, Cutler Hammer, General Electric, Siemens, Square and so on; Widely used in factories, construction sites, hospitals, chemical, power plants and so on.

Multi-functional Breaker Lockouts

Widely used in chemical, beverage, electric, automobile and other industries.

1. New designed electric switch lockout with adjustable measurement scales at the bottom of breaker lockouts. The stop rod is 40mm long, can lock out circuit breaker with a handle width ≤ 37 mm; Suitable for 480/600V circuit breaker. When adjust the length, turn the bottom hook over 90°. There are 6 scale marks on the right, move the bottom hook to the suitable position;
2. Lock out the circuit breaker with slidable long pallet; Still can work effectively under extreme environments (temperature at -45°C to +130°C);
3. Keyhole diameter: 7mm, Suitable for the lockouts with the shackle within 7mm; Can hold 10 pcs padlocks.
4. With label on the product, can mark date and sign, convenient for safety management.

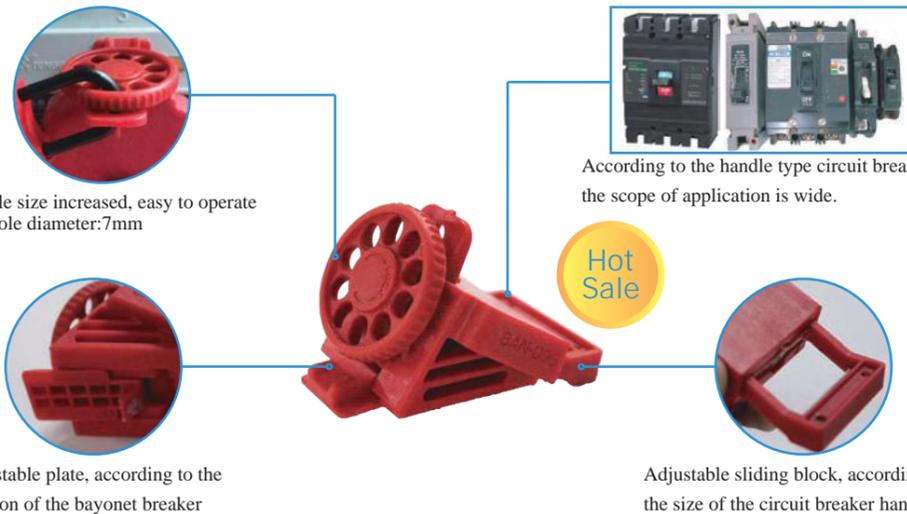

Item NO.	Description
BAN-D95	Lock circuit breaker handle width ≤ 38 mm, height ≤ 19 mm

01 Miniature Circuit Breaker Lockouts

1. A safe and effective method to lock out mini circuit breakers; universal for European and Asian equipment;
2. No tools are needed for the installation of the miniature circuit breaker. You just need a button to finish installation easily;
3. Thumb wheel is used for pull rod type locks for quick completion of installation; available as single-pole and multiple-pole circuit breakers for choice;




Item NO.	Description
BAN-D01	Suitable for miniature circuit breaker hole ≤ 12 mm
BAN-D02	Suitable for miniature circuit breaker hole ≤ 12 mm
BAN-D03	Suitable for multistage miniature circuit breakers
BAN-D04	Suitable for miniature circuit breaker hole ≤ 20 mm
BAN-D88	For locking MCBs/RBOS/RCCBs circuit breakers



■ Nylon mini circuit breaker lockout, this mini circuit breaker lockout can be matched with other locks to using for MCBs, RCBS, RCCBS circuit breakers, ON or OFF position all available;

■ Red & Yellow colours.



BAN-D88RED

BAN-D01 Mini Circuit Breaker Lockout (Pin-Out)

Push button operated and locates into the 2 holes either side of the breaker switch (see illustration). Fits most popular breakers up to 60 Amp. Will also fit breakers connected with a cross bar. Locates prongs inside.



BAN-D02 Mini Circuit Breaker Lockout (Pin-In)

Push button operated and locates into the 2 holes either side of the breaker switch (see illustration). Fits most popular breakers up to 60 Amp. Will also fit breakers connected with a cross bar. Locates prongs outside.



BAN-D03 Pull Type Circuit Breaker Lockout

Adjustable thumb wheel operation and fits larger or multi-pole circuit breakers connected with a cross bar. No holes in the breakers are required.



BAN-D04 Mini Circuit Breaker Lockout (Pin outward and widened)

Push button operated and locates into the 2 holes either side of the breaker switch (see illustration). Extra wide for larger breakers over 60 Amp. Will also fit breakers connected with a cross bar. Locates prongs inside.



02 Snap-on Circuit Breaker Lockouts

BAN-D11 BAN-D12 widely applied: suitable for various single-hole and multihole circuit breakers with a built-in tripping device.

1. Use the wing screws to fix the lock on the switch knob; then fasten the stop cover on the wing screw and lock it out to avoid loosening;
2. The brand new blade type design applies less force onto the wing screw but makes engagement tighter;
3. The removable clamping plate (included) further expands the scope of application;
4. Can use locks with a shackle diameter of 7mm at the max.



- Product Size: Width 16.5mm x Depth 11.6mm;
- Can lockout circuit breakers with a handle width ≤ 18 mm;
- Suitable for 120/277V circuit breakers.




Electrical Switch Lockouts

Create The First-class LOTO Brand



BAN-D12

- Product Size: Width 41.2mm x Depth 13.9mm;
- Can lockout circuit breakers with a handle width ≤ 42 mm;
- Suitable for 480/600V circuit breaker.

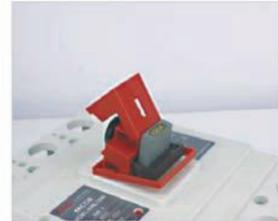

BAN-D13

Superlarge Snap-On Circuit Breaker Lockout

- Product Size: Width 63.5mm x Depth 22.2mm;
- The stop rod (red and green) is 19cm long; can lock out circuit breakers with a handle width ≤ 72 mm;
- Suitable for 480/600V circuit breaker, the red color stop bar indicates that the switch is off, and green color stop bar means switch is open;
- Can be permanently fixed on the power distribution board by the back self-adhesive track - just clean the surface and paste (without drilling).




03 Easily Circuit Breaker Lockouts

- Locks of this type can be fixed fastly and easily without using any tools.
- The general-purpose design is suitable for various single-pole, double-pole and three-pole handle circuit breakers. The locks can be installed so easily that there is no need to modify the panel or the circuit breaker.



Item NO.	Description
BAN-D87	Lock-out lock shackle diameter $\cong 7$ mm safety padlocks

When fixing the lock, users just need to set the circuit breaker handle to "OFF" position and properly arrange the lock on the on/off position; then manually tighten the positioning screw and put on the label and padlock.

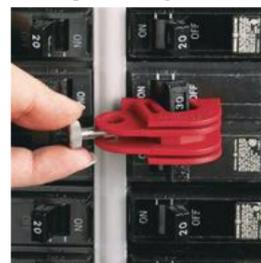

04 Multi-function Breaker Lockouts

Multi-function Breaker Lockouts (BAN-D17)

- Locks of this type can be fixed fastly and easily without using any tools.
- The general-purpose design is suitable for various single-pole, double-pole and three-pole handle circuit breakers. The locks can be installed so easily that there is no need to modify the panel or the circuit breaker.

Item NO.	Description
BAN-D17	Lock-out lock shackle diameter $\cong 7$ mm safety padlocks



Multi-function Breaker Lockouts (BAN-D18/D18N)

- Made of a durable, reinforced nylon and copper screw; chrome plated;
- With locking screw, no need other tools;
- Wide range of uses: suitable to circuit breaker (figure handle width = 20mm);
- Original U type stainless steel insert, can guarantee that the lock will not appear any case of the swing.




Item NO.	Description
BAN-D18	Lock-out lock shackle diameter $\cong 7$ mm safety padlocks
BAN-D18N	"N" means lock body bottom no foot design




05 Universal 415V Industrial Circuit Breaker Lockouts

- Made of good quality stainless steel and PVC; very suitable for circuit breakers used in industrial environment;
- Suitable for circuit breakers with a lever height of 3 inches and a lever width of 0.9 inch; resistant to corrosion; easy for installation;
- Widely suitable for 3-phase circuit breakers, especially the circuit breakers used in industrial environment.

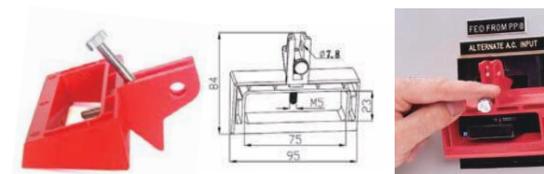

Item NO.	Description
BAN-D91	Lock-out lock shackle diameter $\cong 7$ mm safety padlocks

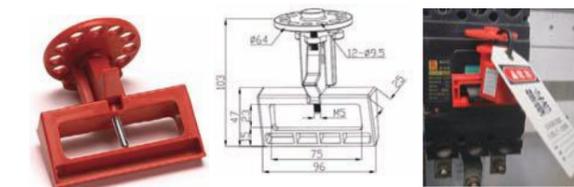

Item NO.	Description
BAN-D92	Twist handle fixed screw, at the same time, can lockout 10 safety padlocks with diameter $\cong 7$ mm lock shackle

Electrical Switch Lockouts


Create The First-class LOTO Brand

06 MCB Switch

1. Universal 1 miniature circuit breaker locks.
2. Put this MCB Switch Lock on the switching position;
3. It may be the easiest and the most common miniature circuit breaker lock for general use. This "switchover lock" is simply collared on the switchover position of the MCB;
4. Use a small screwdriver to screw down the inner flat screw to fix the lock on the switchover block. The padlock then added protects the flat screw against operation and the equipment against disassembly.



Item NO.	Description
BAN-D86	24.5mm×17.5 mm × 7 mm

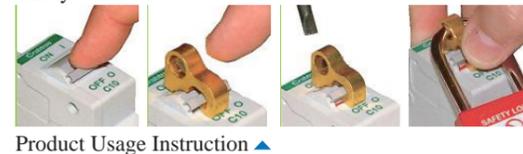


Product Usage Instruction ▲

07 Plug Lockouts

Plug Lockouts(BAN-D45)

1. Used to prevent wired plug from being powered-on;
2. Compact general-purpose design suitable for most 220-240V 3-phase plugs;
3. Fast and easy for installation;
4. The nylon structure provides substantial strength and durability.

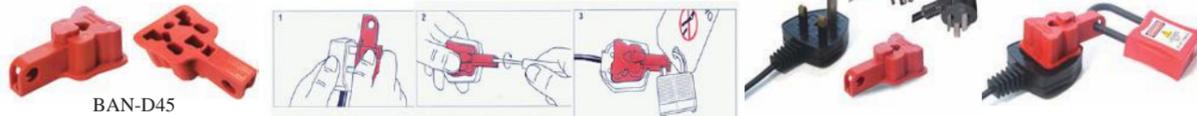

Electrical/Pneumatic Plug Lockouts(BAN-D31)

1. Suitable for electrical plugs of various types (max. diameter: 8.9cm; max. length: 12.7cm) and air hose external thread connector.
2. Can lock out the cable or the downward-bending pneumatic external thread fittings through the holes on the lock.
3. Made of polystyrene material.



Item NO.	Description
BAN-D31	Size: 97mm×95mm × 170 mm; Can lock 5 Pneumatic plug lockouts hole diameters:9.5mm,10.4mm,11.4mm,12mm,18.2mm

Electrical/Pneumatic Plug Lockouts(BAN-D41/D42)

1. A plug lock which can prevent electrical plugs from being inserted in wall sockets. Use it when it is impossible for a maintainer and repairman to put a plug under his complete control;
2. Small 110V plug lock: 5.1cm(height)×5.1cm(thickness)×8.9cm(width); a cable with a diameter of 1.3cm;
3. Large 220/500V plug lock: 8.3cm(height)×8.3cm(thickness)×17.8cm(width); a cable with a diameter of 2.5cm.



Item NO.	Description
BAN-D41	Small plug lockouts Size: 51mm× 51mm × 89 mm;
BAN-D42	Large plug lockouts Size: 83mm× 83mm × 178 mm;



Electrical/Pneumatic Plug Lockouts(BAN-Q31-1)

1. A plug lock which can prevent electrical plugs from being inserted in wall sockets. Use it when it is impossible for a maintainer and repairman to put a plug under his complete control;

Item NO.	Description
BAN-Q31-1	plug lockouts Size: 130mm× 165mm × 85 mm;



Multipurpose Industrial Waterproof Plug Lockouts(BAN-D46)

1. This device provides an easy and effective method to effectively insulate the plug from the adapter.
2. It can be easily fixed on the round-shaped male plug wall thus to block the plug from being connected with electric source.
3. This lockout device is specially designed for plug adapters of all types.



Item NO.	Description
BAN-D46	Suitable for 16-125A industrial waterproof lockouts



Multipurpose Industrial Waterproof Plug Lockouts(BAN-D43)

1. This new design is very suitable for locking out pins and sleeve surface mounted sockets to prevent the same from use during the lockout/tagout procedure;
2. Available in 8 specifications for choice; application range: 400V 32A ;
3. Just need to insert the lockout device in the socket and fasten the socket in the right position and then use the padlock or hasp lock to lock out the socket in place.


- Certified and tested according to the European Standard;
- Stable flame retardant and anti-ultraviolet properties;
- Can be used repeatedly.



ITEM NO.	Color	Specification
BAN-D43YLW	Yellow	Suitable for 400V 32A
BAN-D43RED	Red	Suitable for 400V 32A
BAN-D43BLU	Blue	Suitable for 400V 32A

Multipurpose Industrial Waterproof Plug Lockouts(BAN-D47)

1. Directly inserted in power source, this lockout device can effectively insulate electric power energy and prevent accidental operation during maintenance.
2. Can put a padlock or hasp to ensure the lockout of power source.
3. Its installation needs no tools. The eye-catching bright red alerts the people who intend to restore the energy.
4. Two labels are provided on both sides of the lock to warn that the power plug is locked out and cannot be removed or record the information on the person who is performing the lock-out procedure.

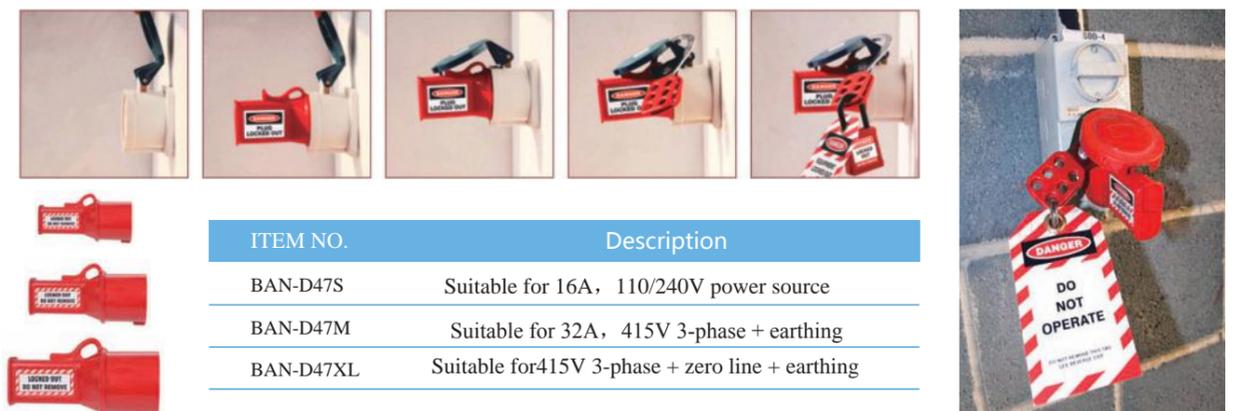


ITEM NO.	Description
BAN-D47S	Suitable for 16A, 110/240V power source
BAN-D47M	Suitable for 32A, 415V 3-phase + earthing
BAN-D47XL	Suitable for 415V 3-phase + zero line + earthing



Button Lockouts (BAN-D59)


Widely used for chemical, beverage, electric, automobile and other industries

1. Made of transparent high-strength glass resin material;
2. Free from removal and easy for installation. Just need to install the base seat on the bottom of the emergency switch. Can be locked out and removed whenever required;
3. Be permanently installed on push-pull or spiral release emergency stop buttons to prevent accidental touch;
4. Wide range of applications, including button lockouts, switch lockouts, emergency stop button lockouts.

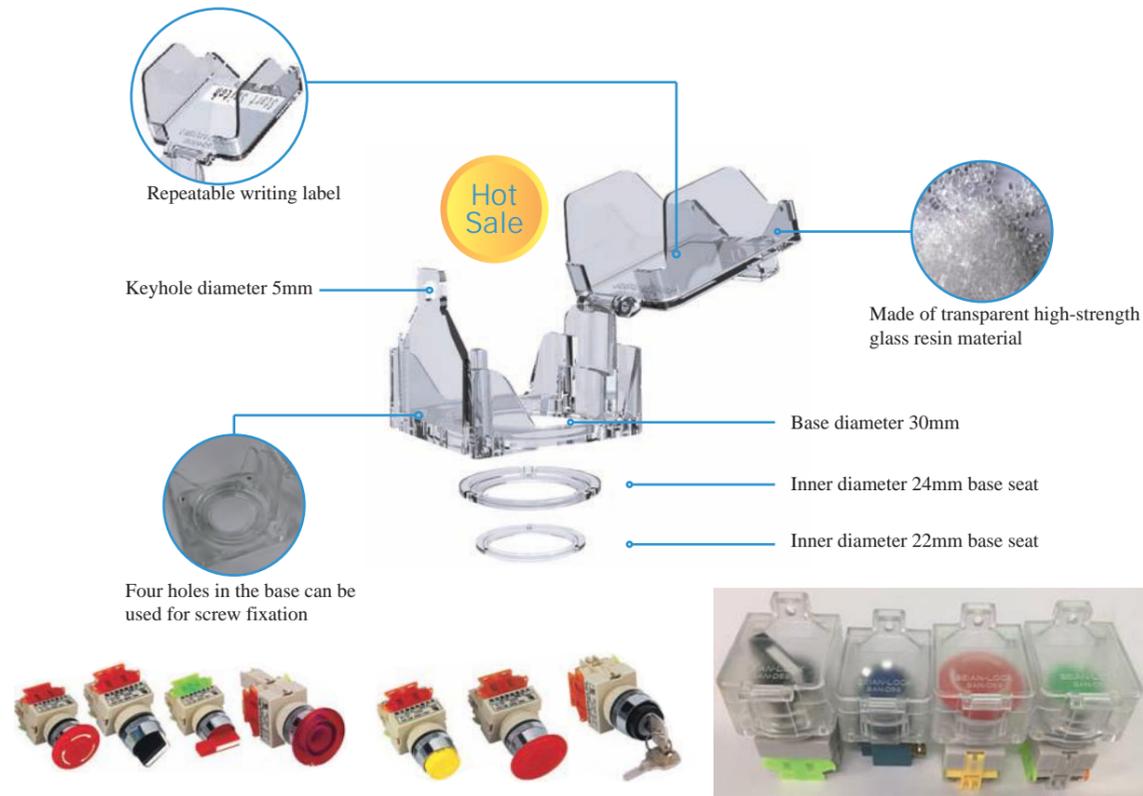

ITEM NO.	Description
BAN-D59 1	Main lock body (Inner diameter 30mm) + Base with 3M double-sided adhesive
BAN-D59 2	Main lock body + Inner diameter 24mm base seat (Base with 3M double-sided adhesive)
BAN-D59 3	Main lock body + Inner diameter 22mm base seat + Inner diameter 24mm base seat (Base with 3M double-sided adhesive)

Operation 1: Unscrew, install, and lock. Use of their structure to jam the base to achieve lock effect.

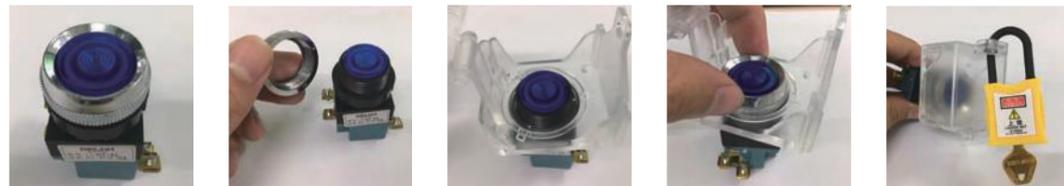

Operation 2: 3M adhesive on the base, and then fixed in the use of the panel (Suitable for small button spacing, and most of the buttons and urgent stop switch).



08 Button Lockouts

Emergency Stop Lockouts (BAN-D50/50S/50M/50L)

1. Made of transparent high-strength glass resin material;
2. Free from removal and easy for installation. Just need to install the base seat on the bottom of the emergency stop switch. Can be locked out and removed whenever required;
3. Be permanently installed on push-pull or spiral release emergency stop buttons to prevent accidental touch.




ITEM NO.	Description
BAN-D50	Main lock body
BAN-D50S	Main lock body + Inner diameter 22mm base seat
BAN-D50M	Main lock body + Inner diameter 30mm base seat
BAN-D50L	Main lock body + Inner diameter 38mm base seat (Base with 3M double-sided adhesive)



Superlarge Press-Key Lockouts (BAN-D56)

1. This large-sized lock can be easily assembled on large button switches to prevent the button from being operated.
2. The body of this lock is a large round cylinder shape with inner dimensions of 70mm*85mm.
3. It is very suitable for distribution panels, control stations, special-type cranes and heavy-duty machinery.

ITEM NO.	Description
BAN-D56	Suitable for large button switches

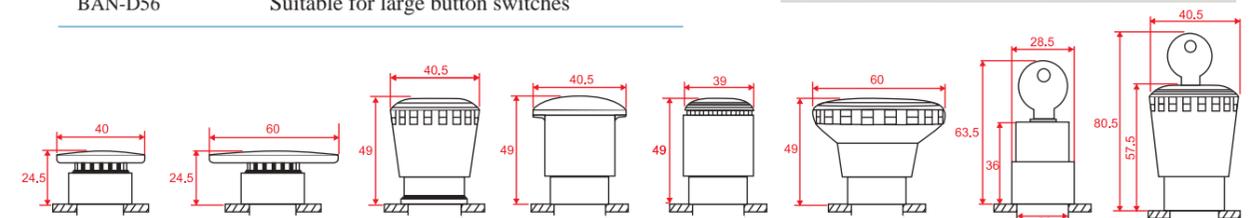

Mushroom Press-key Switch Lockouts (BAN-D55CR)

1. Specially intended for mushroom-shaped emergency stop buttons and made of special reinforced material.
2. Transparent design makes content eye-catching;
3. External dimensions: 110mm x 75mm.


ITEM NO.	Description
BAN-D55	Mushroom Press-Key Switch Lockouts
BAN-D55CR	Mushroom Press-Key Switch Lockouts





09 Control Panel Lockouts

- 1.This product is made of plexiglas or acrylic panel;
- 2.With support frame designed,convenient for operating the panel;
- 3.Fixed by self-tapping screws or 3M double-sided adhesive;
- 4.This product can be customized. Plated steel and transparent cover for options of bottom customization.

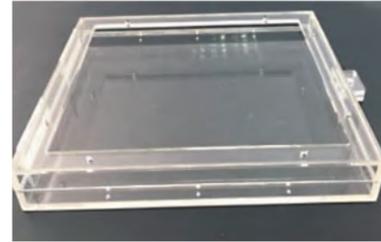

ITEM NO.	Description
BAN-D65	Suitable for large button switches



10 Socket/Switch Protective Cover

BAN-D06

- 1.Prevent plugs from accidental fall off from sockets or switch on or off an electrical equipment from power source;
- 2.Very suitable for electrical appliances of many types, including for the temporary or permanent use in testing,laboratory;
- 3.Eliminate costly downtime and restoration costs;
- 4.Prevent children or operators from electric shock due to illegal operation;
- 5.Suitable for most standard 13A sockets;
- 6.Made of PVC,internal structure is clearly visible.



Switch Safety Protective Covers(BAN-D07)

- 1.suitable for single 45A double-pole switches,pull wires and all 25A single double-pole switches currently in the market, such as lamp switches and standard switches.It is effective to prevent unauthorized operation and misuse.
- 2.Material: made of 1.8mm-thick lightweight, durable, sturdy and abrasion-resistant PVC material;
- 3.Dimensions: 96mm x 96mm x 62mm;can be easily stored in a toolbox;
- 4.Appearance:transparent color.Color is custom-makeable and company LOGOs can be added (please contact us for further information);
- 5.With hinged door,can completely cover the switch to prevent misuse.



11 Self-adhesive Electrical Long-handle Lockouts

- 1.Made up of a 13-hole tape and two clips; can be fixed around the handle on an electrical panel and be locked out in position with a clamp and padlock to prevent the switch lever from movement.
- 2.This product is the fittest handle-type switch;tape is made of 24mm* 300mm powder coated stainless steel material; 13 pack lock hole positions are provided.
- 3.Electrical panel is made of ABS; Diameter 65mm.



ITEM NO.	Description
BAN-D57	Suitable for large button switches



12 Multi-purpose Industrial Electric Lockouts

- 1.Lock body is made of alloy engineering plastics and A3 galvanized steel;
- 2.Achieve lockout of a variety of non-standard electrics or power distribution cabinets;
- 3.Fixed by 3M double-sided adhesive or screws;
- 4.Different shapes of lock can be designed according to customers' requirements.



Lock knob switch,change-over switch etc.



Lock button switch, keyhole of power distribution cabinet etc.



Lock cabinet door,electric handle hole,low-voltage drawer etc.



Lock switch handle of drawer,change-over switch etc.



Lock handle switch etc.



12 Up-Down Controller Straining Bag

- 1.Suitable application dimensions: diameter178mm x height 432mm.
- 2.Insert the PVC liner to prevent other people from coming into contact with the button on the up-down controller.
- 3.Flexible, durable and tear-proof; the nylon bag can be easily stored in a safety toolbox.
- 4.Allow for 6 locks or hasps.
- 5.Effectively lock special sizes or large junction box ,and up-down control straining bag.





Gas Cylinder Lockouts(BAN-Q31)


- 1.Prevent unauthorized operation of the main gas cylinder valve.
- 2.Needless to require that the various diameters and threads of the lock and the gas cylinder cover completely match with each other.
- 3.Suitable for neck rings with a diameter of 8.9cm at the max.
- 4.Installation can be finished in a few seconds; the LOTO procedure can be finished easily and quickly.
- 5.Suitable for 0.8cm-4.5cm valves.



Item NO.	BAN-Q31-1	BAN-Q31-2	BAN-Q31-3
Description	Yellow lock body, Lock all kinds of plugs	Yellow lock body, Lock cylinder valve	Yellow lock body, Lock large cylinder valve

02 Pneumatic Quick Circuit Breaker Lockouts


- 1.Can isolate pneumatic power without installing a direct interlocking valve; cost reducing; more convenient.
- 2.The lock can be connected with an external thread coupler to realize isolation of the equipment from all compressed air sources.
- 3.The center hole of the lock can be used to store an air hose permanently; the side ring can be used to hang the hose and the lock.
- 4.Can use a padlock with a shackle diameter of 1/4"(6.4mm) or 9/32"(7.1mm) for lockout purpose.
- 5.Suitable for most 6.4mm, 9.5mm and 12.7mm external thread connectors.

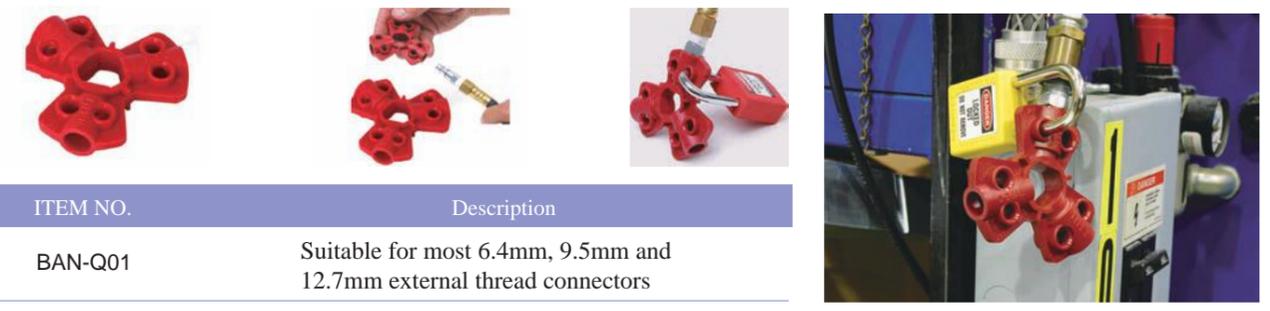

ITEM NO.	Description
BAN-Q01	Suitable for most 6.4mm, 9.5mm and 12.7mm external thread connectors

03 Gas Source Lockouts

- 1.Prevent a gas source joint from reconnecting with a high pressure source,
- 2.Suitable for almost all gas source male joints in factories; made of steel;corrosion-resistant.
- 3.Dimensions: 3 Width 35mm×Length 196mm×Thickness 3mm.
- 4.Matchable with all safety padlocks and safety hasps; used together with hasps; suitable for use by multiple workers to perform lockout concurrently.
- 5.Suitable for 0.8cm-4.5cm valves.

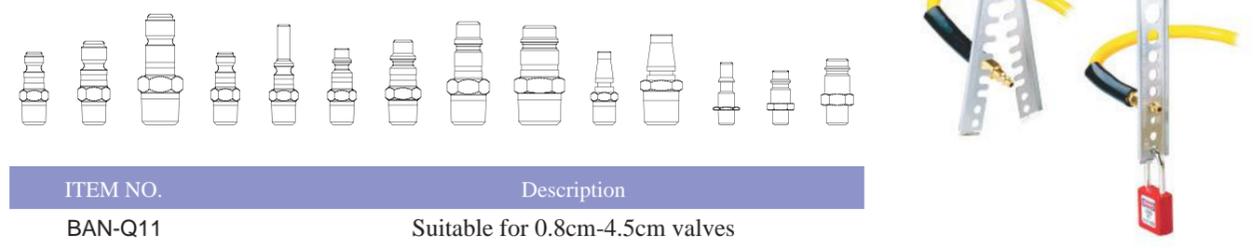

ITEM NO.	Description
BAN-Q11	Suitable for 0.8cm-4.5cm valves

01 Storage Tank Lockouts

- 1.Used to lock out storage tanks, including propane tanks and independent propane storage tanks on forklifts;
- 2.Easily avoid unauthorized operation of the valve stem; designed for use in places with limited space;
- 3.Made of solid polystyrene plastics.



BAN-Q21



Item NO.	Description
BAN-Q21	Valve stem hole diameter: 2.8cm, Suitable for valve diameter≤7.6cm



Lockout/Tagout/Key Station & Management System

Create The First-class LOTO Brand

Key Management Box(BAN-X72)

Widely used for chemical, beverage, electric, automobile and other industries.

- 1.Using high-quality stainless steel; steel surface with computer electrostatic paint treatment; More Rust-proof.
- 2.Solid structure, easy to use.
- 3.With key hooks 20 to 720;13 sizes for options.
- 4.Can be fixed to walls or tables, suitable for use in shops, homes, companies, factories, sauna, bowling, clubs, restaurants, hotels, restaurants, schools and hospitals.

Open the lid for write the name and phone

Slot for inserting colored cardboard, with a number corresponding to the above number

Hot Sale

Key Rack

Key Ring

Magnet


Fixed hole on the wall

Lock hole

Model: BAN-X72-5

Model: BAN-X72-10

it can be used as a notice board

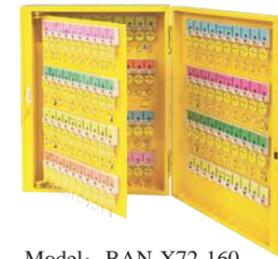

Model: BAN-X72-160

Capacity/Color	160Positions/YLW
Material	1.0m/m Rust-proof Steel;Computer Electrostatic Paint
Size(mm)	500Hx 420Wx 110D



Model: BAN-X72-180

Capacity/Color	180Positions/YLW
Material	1.0m/m Rust-proof Steel;Computer Electrostatic Paint
Size(mm)	500H x 470W x 162D



Model: BAN-X72-240

Capacity/Color	240Positions/YLW
Material	1.0m/m Rust-proof Steel;Computer Electrostatic Paint
Size(mm)	500H x 470Wx 162D



Model: BAN-X72-360

Capacity/Color	360Positions/YLW
Material	1.0m/m Rust-proof Steel;Computer Electrostatic Paint
Size(mm)	1008H x 470W x 162D



Model: BAN-X72-480

Capacity/Color	480Positions/YLW
Material	1.0m/m Rust-proof Steel;Computer Electrostatic Paint
Size(mm)	1008H x 470W x 162D



Model: BAN-X72-540

Capacity/Color	540Positions/YLW
Material	1.0m/m Rust-proof Steel;Computer Electrostatic Paint
Size(mm)	1516Hx 470Wx 162D




Model: BAN-X72-20

Capacity/Color	20Positions/YLW
Material	0.8m/m Rust-proof Steel;Computer Electrostatic Paint
Size(mm)	330H x 220W x 62D




Model: BAN-X72-30

Capacity/Color	30Positions/YLW
Material	0.8m/m Rust-proof Steel;Computer Electrostatic Paint
Size(mm)	500H x 220W x 62D

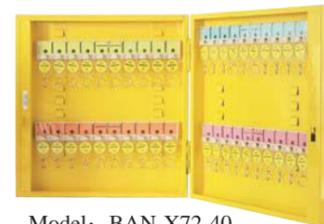


Model: BAN-X72-40

Capacity/Color	40Positions/YLW
Material	0.8m/m Rust-proof Steel;Computer Electrostatic Paint
Size(mm)	390H x 375W x 62D

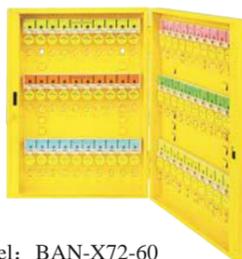


Model: BAN-X72-60

Capacity/Color	60Positions/YLW
Material	0.8m/m Rust-proof Steel;Computer Electrostatic Paint
Size(mm)	500H x 375W x 62D



Model: BAN-X72-80

Capacity/Color	80Positions/YLW
Material	0.8m/m Rust-proof Steel;Computer Electrostatic Paint
Size(mm)	500H x 375W x 62D

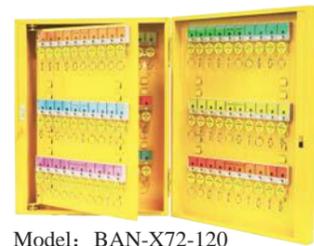

Model: BAN-X72-120

Capacity/Color	120Positions/YLW
Material	1.0m/m Rust-proof Steel;Computer Electrostatic Paint
Size(mm)	500H x 420W x 110D



Model: BAN-X72-720

Capacity/Color	720Positions/YLW
Material	1.0m/m Rust-proof Steel;Computer Electrostatic Paint
Size(mm)	1516H x 470W x 162D




More than 360 key box can increase the clapboard and feet

Different specifications of the key management cabinets, to meet your different needs, so that more standardized management



Lockout Station Hanging Board Center(BAN-B08)

- 1.Suitable for small companies and large departments.Our lockout station hanging boards are available in 7 standard models and made of rigid plastics.Frame with aluminium,the lockout station hanging board is firmer;
- 2.The eye-catching colors black and yellow ensure a high visibility of the station from any position;
- 3.The corresponding shadow silhouette makes counting easy and provides guidance for storage;
- 4.Lockout station hanging boards are custom-makeable as required. Please contact us to learn more.

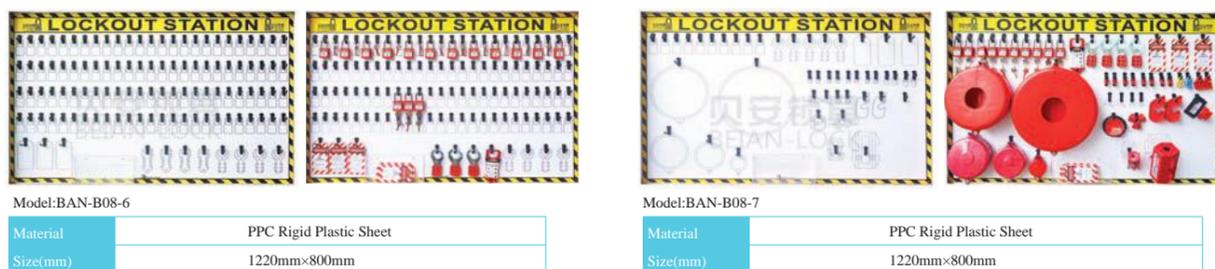

01 Tag Station

- 1.Can store tags with a max. size of 200mm x100mm. Our tagout stations have 10 transparent acrylic containers and can be supplied with or without contents.
- 2.Each container can store no less than 10 pcs tags;
- 3.Dimensions: 500mm(Length)x 600mm(Height).



02 Advanced Lockout Stations


- 1.Integrated plastic injection molding structure without loosening parts ,or Powder coated steel work station made of strong locks;
- 2.Resilient polycarbonate materials form double heat resistant and quadruple impact resistant capabilities compared with common lockout stations.
- 3.Reinforced hasp facilitates the hanging and selection of padlocks and hasps.
- 4.The unique transparent cover protects the locks stored inside.
 - Can be securely locked out to protect valuable safety padlocks against damage. It is recommended that a coded lock be used to facilitate control.
 - The innovative hinge design can leave the cover open to facilitate selection.
- 5.Contain safety hasps and tags.






03 Padlock Station

Metal lock hanging rack made of carbon steel; available in 4 specifications for choice; facilitate daily management of locks.

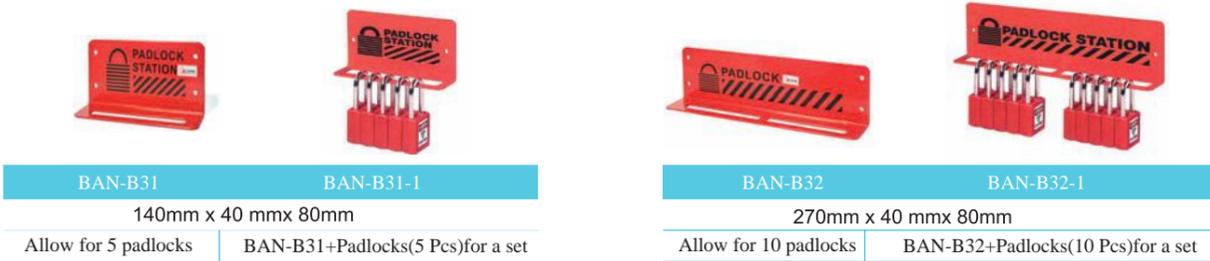

Item NO.	Description	Size(Width×Depth×Height)(mm)
BAN-B31	BAN-B31-1	140mm x 40 mmx 80mm
Allow for 5 padlocks	BAN-B31+Padlocks(5 Pcs)for a set	

Item NO.	Description	Size(Width×Depth×Height)(mm)
BAN-B32	BAN-B32-1	270mm x 40 mmx 80mm
Allow for 10 padlocks	BAN-B32+Padlocks(10 Pcs)for a set	

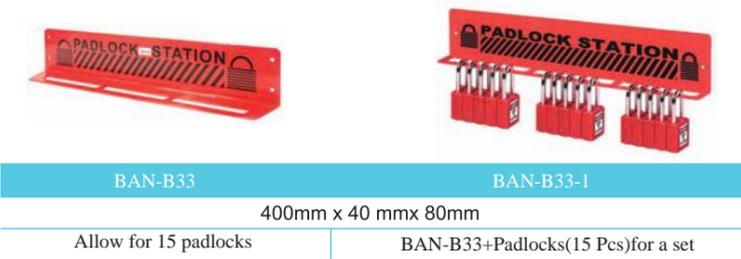

Item NO.	Description	Size(Width×Depth×Height)(mm)
BAN-B33	BAN-B33-1	400mm x 40 mmx 80mm
Allow for 15 padlocks	BAN-B33+Padlocks(15 Pcs)for a set	



Item NO.	Description	Size(Width×Depth×Height)(mm)
BAN-B34	BAN-B34-1	530mm x 40 mmx 80mm
Allow for 20 padlocks	BAN-B34+Padlocks(20 Pcs)for a set	

Product Display ▼
The combination of a single product has become an advanced management system, customers can be customized according to the actual needs.



04 Small Safety Lockout Cabinet

- Used to ensure that different departments or technicians cannot take out any documents, certificates or other important items. The cabinet remains unopenable unless all padlocks are removed;
- his lockout cabinet has a lock with 5 independent keys. You can also customize the lockout quantity and specification desired by you;
- Made of powder-coated steel plate; 2 interlayers and 1 acrylic glass window provided; different keys fit different locks; safe and stable; each lock is provided with a clear sign for easy identification.



Item NO.	Description	Size(Width×Depth×Height)(mm)
BAN-X63(Blue)	Safety lockout cabinet	140 X 140X 100
BAN-X63(White)	Safety lockout cabinet	160 X 160X 100

05 Lockout Equipment Box

- Has fixed shelves for storing safety locks not in use temporarily;
- Made of powder-coated strong steel material;
- Suitable for wall installation; 1 key is provided to ensure the safety of the locks in the box.



ITEM NO.	Description(Width x Depth x Height)(mm)
BAN-X02	350mm×150mm×450mm

ITEM NO.	Description(Width x Depth x Height)(mm)
BAN-X65-1	480mm×180mm×600mm with transparent panel,back cover plate thickness 1mm,front cover plate thickness1.2mm

06 Padlock and Lockout Equipment Storage

- Very suitable for centralized management of your LOTO equipment;
- Compartment dimensions: 305mm × 305mm × 457mm (altogether 6/12 compartments);
- Each compartment is equipped with its own hinge and padlock to ensure that only authorized key holders can use the storage equipment.



ITEM NO.	Description
BAN-X34-1	600mm×450mm×1360mm

ITEM NO.	Description
BAN-X34	900mm×450mm×1360mm



07 Padlock Storage Cabinet

- Padlock Storage Cabinet With 25pcs Hooks**
- Made of powder-coated strong steel; hanging hooks with a number and colored code,key labels and card indexes provided;
 - Each padlock storage cabinet with 2 keys;
 - There are certain width between hooks to facilitate padlock storage; completely adjustable hanging hooks can be positioned to fit padlocks of different sizes.



Sizes(Width x Depth x Height)	Description
380mm×140mm ×350mm	Blank Padlock Storage Cabinet with 25 pcs Hooks

Sizes(Width x Depth x Height)	Description
380mm×140mm ×350mm	Padlock Storage CabinetBAN-X33-25(1Pcs)+Safety Padlocks(25 Pcs)

Create The First-class LOTO Brand

Padlock Storage Cabinet With 400/540/720pcs Hooks

1. The cabinet body made by 1 mm welding cold-roll steel plate;
2. Internal panel was designed as push-pull, key rack are installed on two sides of the panel, each raw could hang 5 keys, and one side panel can hang 80/90 keys, as a total of 160/180 keys for one panel.
3. The push-pull panels are designed for W 45 mm × L450mm slides, which could withstand 40 kg weight. The material of the Guide rail we have carbon steel and stainless steel to be chosen, and you could choose the color black/white.
4. Push -pull design, space saving, easy to operate, high reliability. We designed A4 Record book on the side, which is convenient to record.
5. The whole box is about 135 kg net weight. 4 feet cups with 4 casters (2 with brake) were installed to the bottom, which is very convenient to move.
6. This product can provide can be customized according to client's request.



BAN-X33-400



BAN-X33-540

Sizes(Width x Depth x Height)

Description

789mm×456mm ×1544mm


Blank Padlock Storage Cabinet with 400 pcs Hooks

914mm×456mm ×1761mm

Blank Padlock Storage Cabinet with 540 pcs Hooks

1162mm×456mm ×1761mm

Blank Padlock Storage Cabinet with 720 pcs Hooks

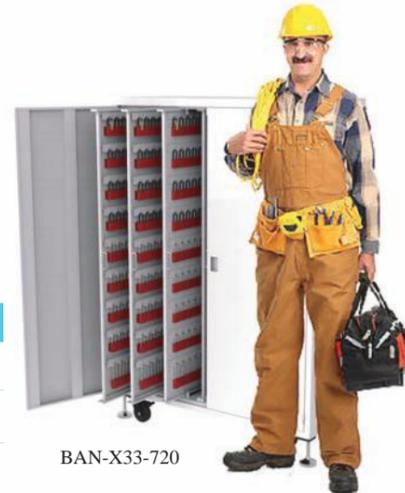

BAN-X33-720

08 Key Cabinet

Small Safety Key Cabinet With 20/30pcs Keys

1. Can store a single key or a small bunch of keys;
2. Contain color-coded hooks and necessary key signs;
3. colored bar movable;
4. A complete key use log is provided for monitoring the use of the key(s);
5. Material: silver grey powder coated.



Item NO.	Specification	Description(width×depth×height)(mm)	Colour
BAN-X76-20	Can hold 20 keys	170 x 75 x 250	Silver /Yellow
BAN-X76-30	Can hold 30 keys	230 x 75 x 320	Silver /Yellow

Visible Key Cabinet With 50pcs Keys

1. Color-coded hanging hooks with a number, key signs and card index included; strong cylinder lock with 2 keys.
2. The hooks are adjustable in order to be positioned to fit keys of different sizes.
3. The glass door makes it "clear at a glance" which keys are used, needless to open the cabinet door.
4. Key cabinet made of powder-coated strong steel.



BAN-X31-50



Item NO.	Specification	Description(width×depth×height)(mm)
BAN-X31-50	Can hold 250 keys	380×80×550




09 Group Lockout Box

Red and Yellow Safety Lockout Tagout Box

A key storage device designed for large equipment lockout.

1. Each lockout point on the equipment allows for only one lock to ensure safety. Collect the keys and put them in the lockout box; then each authorized worker puts his own padlock on the box;
2. At completion of the work, the workers need to remove their respective padlocks from this box to take the keys out of the box. Only after the last worker removes his padlock can all workers get their respective keys;
3. Suitable for 12 or 20 workers to perform lockout concurrently. It is ensured that the group lockout box cannot be opened before the last padlock or hasp is removed and undone;
4. Locked-out warning catchwords available in English and other languages .

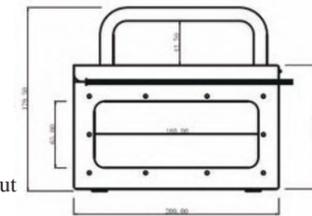

Item NO.

Description

BAN-X04

Group lockout box; can hold 20 padlocks at the max



Item NO.

Description

BAN-X05

Visible group lockout box, can hold 20 padlocks at the max

Acrylic Safety Lockout Tagout Box

1. Suitable for wall-hung/desk installation; portable; carrying handle included.
2. Electric spark preventing; lightweight, only 600g; transparent front cover makes it easy to check inside status.
3. Six key hooks; allow for sixteen 9mm padlocks concurrently.



Item NO.

BAN-X18



Description(width×depth×height)(mm)

200×90×150(Not including the handle)



10 Portable Padlock Station Lockout Rack

1. Chinese or English Labels;
2. It can most carrying 12 padlocks at the same time;
3. Material: engineering plastics reinforced nylon injection molding.



Item NO.

BAN-B35



9.5mm

Description

handle group lockout box, can hold 12 padlocks at the same time



BAN-B35

Create The First-class LOTO Brand



11 Easy-To-Pull Pull Reel

- 1.All metallic; material: chrome-plated zinc alloy.
- 2.LOGO can be printed on the front; stainless steel pull wires or nylon pull wires included; freely telescopic.
- 3.Suitable for use as promotion articles, handbag accessories and advertisement key rings; safety key rings which can prevent losing and theft.

ITEM NO.	Description
BAN-X25	Full metal,zinc chrome plating



12 Lockout Tagout Kit Bag

Lockout Tagout Kit Bag in Yellow plus Blue/Blue plus Black

- 1.With the embedded iron wire frame support, the bag can be left open for easy tool selection during work;
- 2.The bag is made of durable waterproof nylon. It has outer and inner pockets as well as a carrying handle and shoulder strap;
- 3.Available for individuals or groups to use;
- 4.Can accommodate various types of security locks, taps.



ITEM NO.	BAN-T23-1	BAN-T23-2	BAN-T23-3
Description	small size 320 x 230 x 280	middle size 400 x 300 x 280	large size 450 x 300 x 340



ITEM NO.	BAN-T28-1	BAN-T28-2	BAN-T28-3
Description	small size 320 x 230 x 280	middle size 400 x 300 x 280	large size 450 x 300 x 340



3-Pocket Lockout Kit

- 1.This waist pack is made of thickened nylon material and specially designed for the workers who need to move around carrying safety locks;
- 2.The waist pack contains 3 independent pockets to facilitate your management of safety locks so that you can find a desired equipment more quickly.



ITEM NO.	Dimensions (Length x Width x Height) (mm)
BAN-T21	400 x 50 x 150



13 Kit combination -- Can be combined freely

Smart-Locks recommend the following packages for your reference, you can also customize according to your needs.



ITEM NO.	Description
BAN-TC01	Basic Electrical Safety Lockout Kit



ITEM NO.	Description
BAN-TC02	Electrical Safety Lockout Kit



ITEM NO.	Description
BAN-TC03	Valve Maintenance Lockout Kit



ITEM NO.	Description
BAN-TC04	Chosen Electrical/Valve Lockout Kit

14 Product display board

This product is a display board that Bean Lock provides customers with product display and training. It can be moved or fixed. The product is part of the product, for more products to display, please contact our sales. Provide a custom combination, Behan can provide you with the corresponding energy point or you provide customized by our company to help.

